

## MEDIUM POWER NPN SILICON TRANSISTORS

- STMicroelectronics PREFERRED SALESTYPES
- NPN TRANSISTOR

#### **APPLICATIONS**


 LINEAR AND SWITCHING INDUSTRIAL EQUIPMENT


#### **DESCRIPTION**

The 2N5191 and 2N5192 are silicon epitaxial-base NPN transistors in Jedec SOT-32 plastic package.

They are inteded for use in medium power linear and switching applications.

The complementary PNP type of 2N5192 is 2N5195.





#### **ABSOLUTE MAXIMUM RATINGS**

Symbol	Parameter	Va	Value		
		2N5191	2N5192	Unit	
V <sub>CBO</sub>	Collector-Base Voltage (I <sub>E</sub> = 0)	60	80	V	
V <sub>CEO</sub>	Collector-Emitter Voltage (I <sub>B</sub> = 0)	60	80	V	
V <sub>EBO</sub>	Emitter-Base Voltage (I <sub>C</sub> = 0)		5	V	
Ic	Collector Current		4	Α	
I <sub>CM</sub>	Collector Peak Current		7	Α	
Ι <sub>Β</sub>	Base Current	1		Α	
P <sub>tot</sub>	Total Dissipation at T <sub>c</sub> ≤25 °C	40		W	
T <sub>stg</sub>	Storage Temperature	-65 to 150		°C	
T <sub>i</sub>	Max. Operating Junction Temperature	1	50	°C	

December 2000 1/4

### THERMAL DATA

R <sub>thj-case</sub>	Thermal Resistance Junction-case	Max	3.12	°C/W	
$R_{thj-amb}$	Thermal Resistance Junction-ambient	Max	100	°C/W	

## **ELECTRICAL CHARACTERISTICS** (T<sub>case</sub> = 25 °C unless otherwise specified)


Symbol	Parameter	Test Conditions	Min.	Тур.	Max.	Unit
Ісво	Collector Cut-off Current (I <sub>E</sub> = 0)	V <sub>CB</sub> = rated V <sub>CBO</sub>			0.1	mA
I <sub>CEX</sub>	Collector Cut-off Current (V <sub>BE</sub> = -1.5V)	$V_{CE}$ = rated $V_{CEO}$ $V_{CE}$ = rated $V_{CEO}$ $T_c$ = 125 $^{\circ}C$			0.1 2	mA mA
I <sub>CEO</sub>	Collector Cut-off Current (I <sub>B</sub> = 0)	V <sub>CE</sub> = rated V <sub>CEO</sub>			1	mA
I <sub>EBO</sub>	Emitter Cut-off Current (I <sub>C</sub> = 0)	V <sub>EB</sub> = 5 V			1	mA
$V_{CEO(sus)}*$	Collector-Emitter Sustaining Voltage	I <sub>C</sub> = 100 mA for <b>2N5191</b> for <b>2N5192</b>	60 80			V V
V <sub>CE(sat)</sub> ∗	Collector-Emitter Saturation Voltage	I <sub>C</sub> = 1.5 A			0.6 1.4	V V
$V_{BE}*$	Base-Emitter Voltage	I <sub>C</sub> = 1.5 A V <sub>CE</sub> = 2 V			1.2	V
h <sub>FE</sub> *	DC Current Gain	I <sub>C</sub> = 1.5 A V <sub>CE</sub> = 2 V for <b>2N5191</b> for <b>2N5192</b> I <sub>C</sub> = 4 A V <sub>CE</sub> = 2 V for <b>2N5191</b>	25 20 10		100 80	
		for 2N5192	7			
$f_T$	Transition frequency	$I_C = 1 A$ $V_{CE} = 10 V$	2			MHz

<sup>\*</sup>Pulsed: Pulse duration = 300 μs, duty cycle 1.5 %

2/4

# SOT-32 (TO-126) MECHANICAL DATA

DIM.	mm			inch			
D.IWI.	MIN.	TYP.	MAX.	MIN.	TYP.	MAX.	
Α	7.4		7.8	0.291		0.307	
В	10.5		10.8	0.413		0.445	
b	0.7		0.9	0.028		0.035	
b1	0.49		0.75	0.019		0.030	
С	2.4		2.7	0.040		0.106	
c1	1.0		1.3	0.039		0.050	
D	15.4		16.0	0.606		0.629	
е		2.2			0.087		
e3	4.15		4.65	0.163		0.183	
F		3.8			0.150		
G	3		3.2	0.118		0.126	
Н			2.54			0.100	

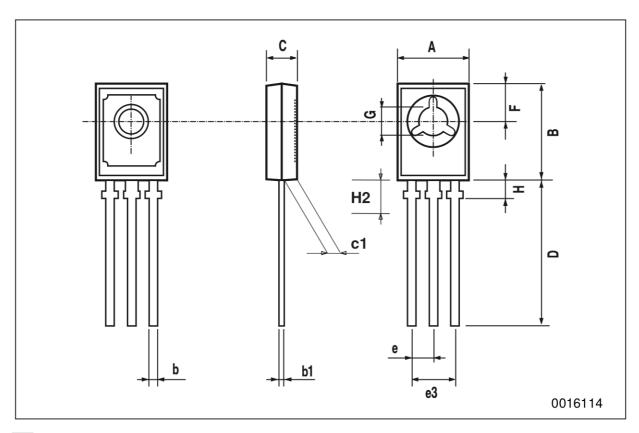

47/

Information furnished is believed to be accurate and reliable. However, STMicroelectronics assumes no responsibility for the consequences of use of such information nor for any infringement of patents or other rights of third parties which may result from its use. No license is granted by implication or otherwise under any patent or patent rights of STMicroelectronics. Specification mentioned in this publication are subject to change without notice. This publication supersedes and replaces all information previously supplied. STMicroelectronics products are not authorized for use as critical components in life support devices or systems without express written approval of STMicroelectronics.

The ST logo is a trademark of STMicroelectronics

© 2000 STMicroelectronics – Printed in Italy – All Rights Reserved STMicroelectronics GROUP OF COMPANIES

Australia - Brazil - China - Finland - France - Germany - Hong Kong - India - Italy - Japan - Malaysia - Malta - Morocco - Singapore - Spain - Sweden - Switzerland - United Kingdom - U.S.A.

http://www.st.com

**47**