


Three Phase Rectifier Bridge

PSD 82

I_{dAV} = 88 A
 V_{RRM} = 800-1800V

Preliminary Data Sheet

V_{RSM} V_{DSM} (V)	V_{RRM} V_{DRM} (V)	Type
800	800	PSD 82/08
1200	1200	PSD 82/12
1400	1400	PSD 82/14
1600	1600	PSD 82/16
1800	1800	PSD 82/18

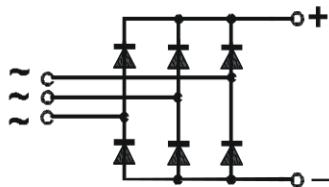

Symbol	Test Conditions	Maximum Ratings		
I_{dAVM}	$T_C = 110^\circ\text{C}$, (per module)	88	A	
I_{FSM}	$T_{VJ} = 45^\circ\text{C}$ $t = 10 \text{ ms}$ (50 Hz), sine $V_R = 0$ $t = 8.3 \text{ ms}$ (60 Hz), sine $T_{VJ} = T_{VJM}$ $t = 10 \text{ ms}$ (50 Hz), sine $V_R = 0$ $t = 8.3 \text{ ms}$ (60 Hz), sine	750 820 670 740	A	
$\int i^2 dt$	$T_{VJ} = 45^\circ\text{C}$ $t = 10 \text{ ms}$ (50 Hz), sine $V_R = 0$ $t = 8.3 \text{ ms}$ (60 Hz), sine $T_{VJ} = T_{VJM}$ $t = 10 \text{ ms}$ (50 Hz), sine $V_R = 0$ $t = 8.3 \text{ ms}$ (60 Hz), sine	2800 2800 2250 2250	A ² s	
T_{VJ}		-40... + 150	$^\circ\text{C}$	
T_{VJM}		150	$^\circ\text{C}$	
T_{stg}		-40... + 125	$^\circ\text{C}$	
V_{ISOL}	50/60 Hz, RMS $t = 1 \text{ min}$ $I_{ISOL} \leq 1 \text{ mA}$ $t = 1 \text{ s}$	2500 3000	V \sim	
M_d	Mounting torque (M5) Terminal connection torque (M5)	5 5	Nm	
Weight	typ.	160	g	

Symbol	Test Conditions	Characteristic Value		
I_R	$V_R = V_{RRM}$, $T_{VJ} = 25^\circ\text{C}$	\leq	0.3	mA
	$V_R = V_{RRM}$, $T_{VJ} = T_{VJM}$	\leq	5	mA
V_F	$I_F = 150 \text{ A}$, $T_{VJ} = 25^\circ\text{C}$	\leq	1.6	V
V_{TO}	For power-loss calculations only		0.8	V
r_T			5	$\text{m}\Omega$
R_{thJC}	per diode; DC current		1.1	K/W
	per module		0.183	K/W
R_{thJK}	per diode; DC current		1.52	K/W
	per module		0.253	K/W
d_s	Creeping distance on surface		10.0	mm
d_A	Creeping distance in air		9.4	mm
a	Max. allowable acceleration		50	m/s^2

Data according to IEC 60747 refer to a single diode unless otherwise stated

Features

- Package with screw terminals
- Isolation voltage 3000 V \sim
- Planar glass passivated chips
- Blocking voltage up to 1800 V
- Low forward voltage drop
- UL registered E 148688

Applications



- Supplies for DC power equipment
- Input rectifier for PWM inverter
- Battery DC power supplies
- Field supply for DC motors

Advantages

- Easy to mount with two screws
- Space and weight savings
- Improved temperature and power cycling capability

Package style and outline

Dimensions in mm (1mm = 0.0394")

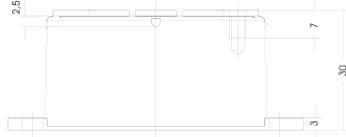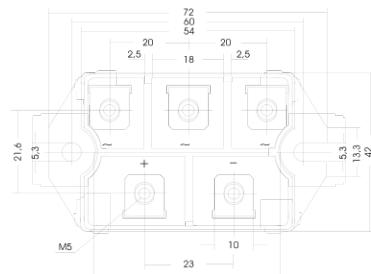

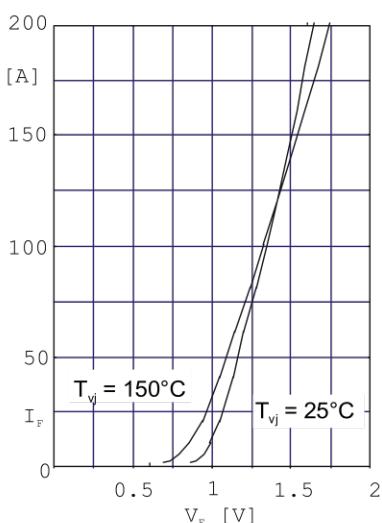


Fig. 1 Forward current versus voltage drop per diode

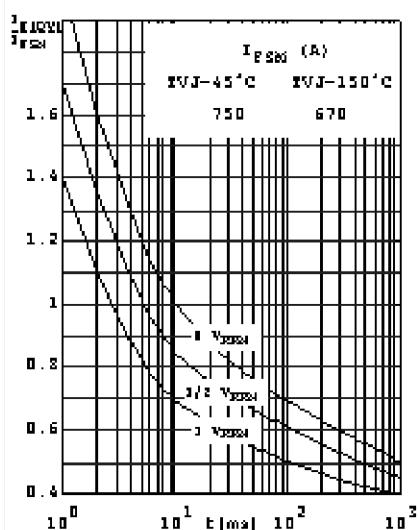


Fig. 2 Surge overload current per diode I_{FSM} : Crest value. t: duration

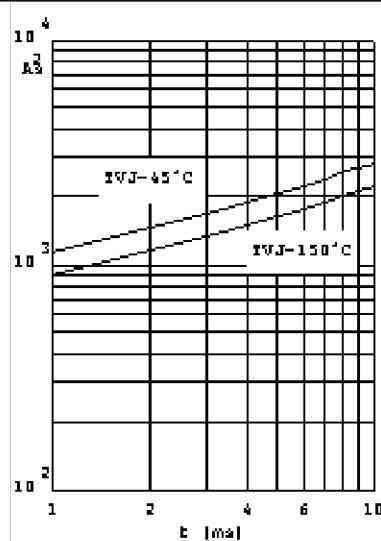


Fig. 3 $\int I^2 dt$ versus time (1-10ms) per diode (or thyristor)

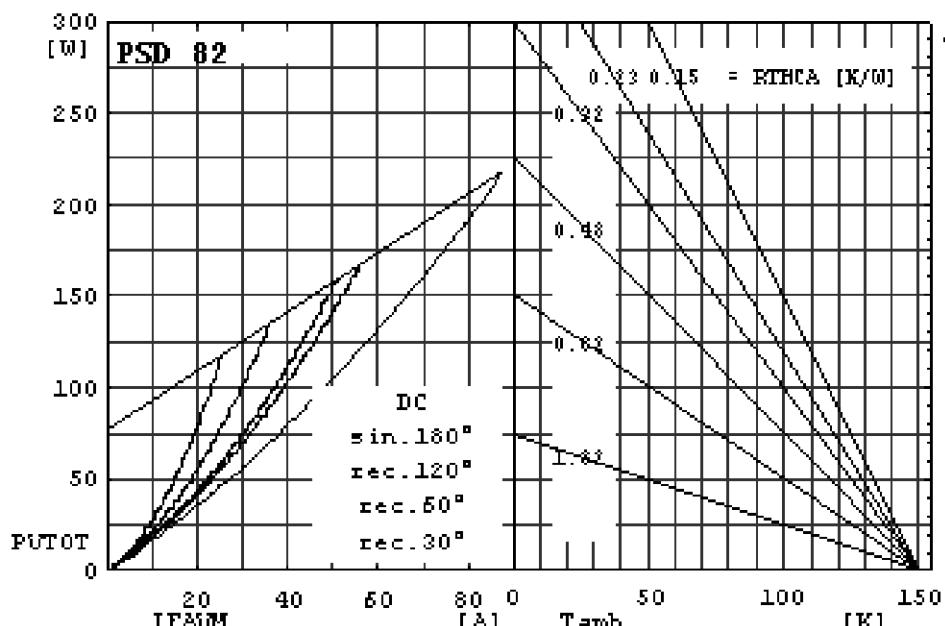


Fig. 4 Power dissipation versus direct output current and ambient temperature

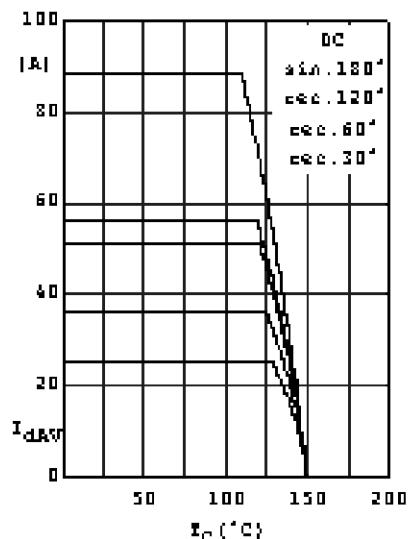


Fig. 5 Maximum forward current at case temperature

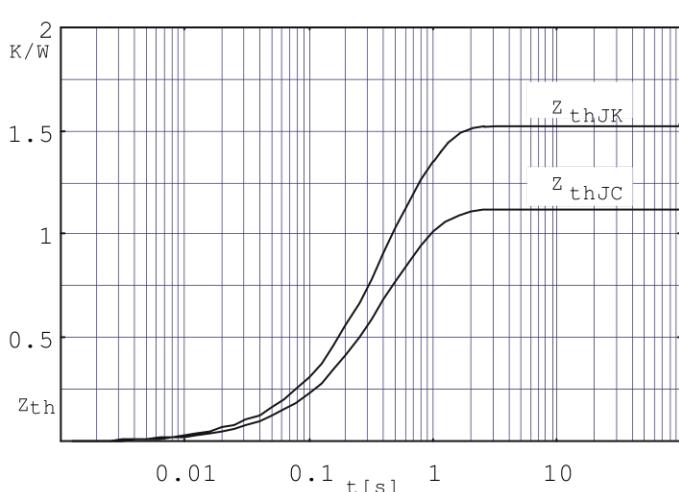


Fig. 6 Transient thermal impedance per diode (or thyristor), calculated