

NOTES:





ELECTRICAL CHARACTERISTICS:

UNLESS OTHERWISE SPECIFIED, TESTING IS PERFORMED AT 25°C ±5°C
(FOR REFERENCE ONLY. USED FOR CUSTOMER INFORMATION)

ITEM	SPECIFICATION	TEST CONDITIONS	VALUE	UNIT
1	I _o : @ NO LOAD	INPUT 230 V, 50Hz	11.80 MAX	mA
2	P _{wo} : @ NO LOAD	INPUT 230 V, 50Hz	0.95 MAX	W
3	U _o : @ NO LOAD	INPUT 230 V, 50Hz	16.60 ±10%	V
4	I _e :@ CURRENT WITH LOAD	INPUT 230 V, 50Hz	16.40 MAX	mA
5	P _{we} :@WATTAGE WITH LOAD	INPUT 230 V, 50Hz	4.10 MAX	W
6	U _a : @ NOMINAL LOAD	INPUT 230 V, 50Hz AT LOAD 100 mA	12.0	V
7	HI-POT: (1,5) TO (7,9)	/	4000VAC, 2 SEC	
8	RATED OUTPUT POWER	/	1.2	VA

MECHANICAL SPEC NOTES:

1. ALL DIMENSIONS ARE IN MM,GENERAL TOLERANCE IS ±0.20MM
2. ALL PIN LENGTH DON'T INCLUDE TIN ICICLE.

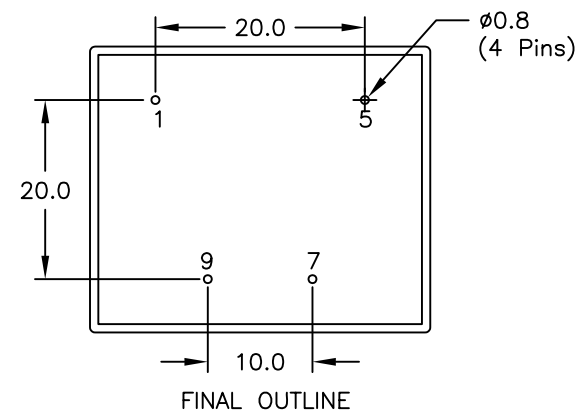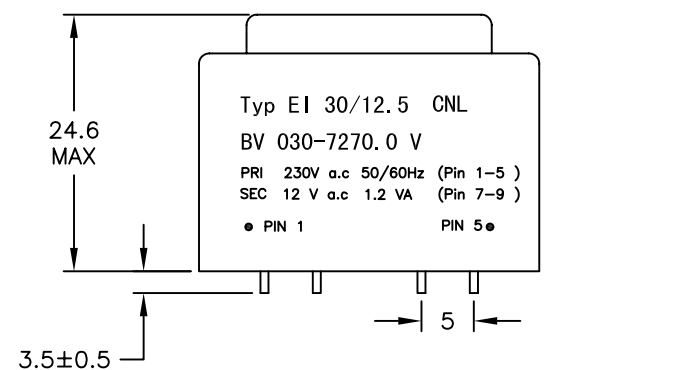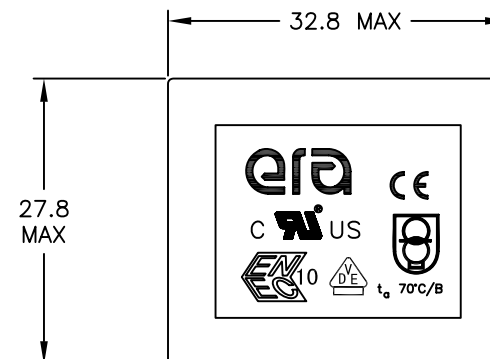

UNLESS OTHERWISE SPECIFIED, ALL
DIMENSIONS ARE IN INCHES
TOLERANCES ARE:
DECIMALS ANGLES
.XX ±.01 ± 1°
.XXX ±.005
DO NOT SCALE DRAWING

SIZE	CAGE CODE	DWG. NO.	REV
SCALE	NONE	030-7270-0	13
SHEET	1 OF 1		