

0.8 Amp. Glass Passivated Bridge Rectifier

<p>Dimensions in mm.</p> <table border="1"> <tr><td>Suffix</td><td>$L \pm 0.5$</td></tr> <tr><td>"A"</td><td>4</td></tr> <tr><td>"B"</td><td>3</td></tr> </table>	Suffix	$L \pm 0.5$	"A"	4	"B"	3	<p>Voltage 100 to 900 V. Current 0.8 A</p> <ul style="list-style-type: none"> • Glass Passivated Junction • Case: Epoxy encapsulation • Terminals: Radial leads • Ideal for P.C.B. <p>Lead and polarity identifications</p>
Suffix	$L \pm 0.5$						
"A"	4						
"B"	3						

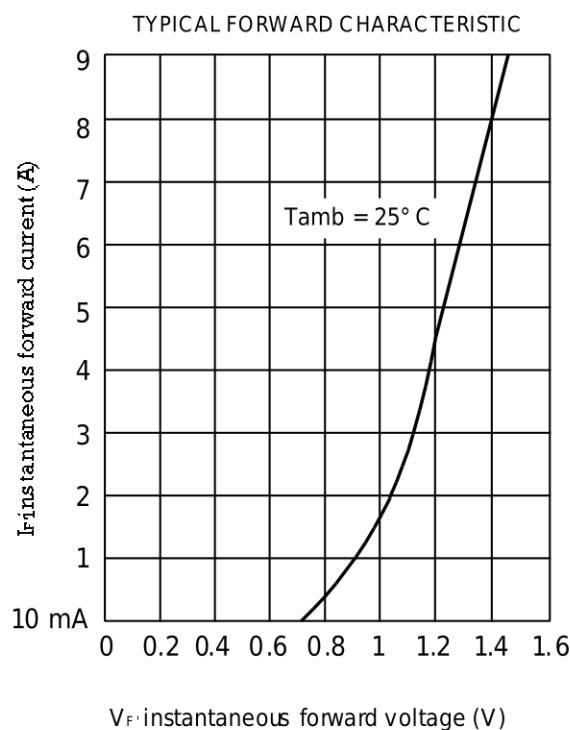
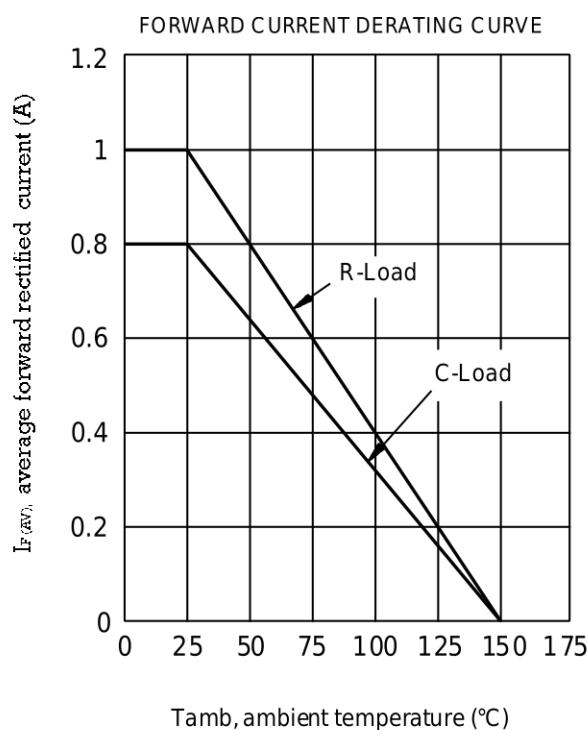
Maximum Ratings, according to IEC publication No. 134

		B40 C 800	B80 C 800	B125 C 800	B250 C 800	B380 C 800
V_{RRM}	Peak Recurrent Reverse Voltage (V)	100	200	300	600	900
V_{RMS}	Maximum RMS Voltage (V)	70	140	210	420	630
V_R	Recommended Input Voltage (V)	40	80	125	250	380
$I_{F(AV)}$	Forward current at Tamb = 25 °C R load C load			1.0 A 0.8 A		
I_{FRM}	Recurrent peak forward current			8 A		
I_{FSM}	10 ms. peak forward surge current			30 A		
I^2t	I^2t value for fusing ($t = 10$ ms)			4.5 A ² sec		
T_j	Operating temperature range			- 40 to + 150 °C		
T_{stg}	Storage temperature range			- 40 to + 150 °C		

Electrical Characteristics at Tamb = 25 °C

V_F	Max. forward voltage drop per element at $I_F = 0.8$ A	1 V
I_R	Max. reverse current per element at V_{RWM}	10 μ A

Characteristic Curves

V_F: instantaneous forward voltage (V)

Tamb, ambient temperature (°C)

OPERATION WITH CAPACITIVE LOAD

Limit values of R_S and C_L for a adequate protection a
gainst switching transient.

Recommended input voltage V _{RMS}	Min. RS Tol ± 10 % Ohms	Max CL Tol +50 % -20 % μ F
40	1	2500
80	2	1000
125	3	500
250	6	250
300	14	150

