



HITPOINT

TEL: 8862-26013311

FAX: 8862-26013898

NO.4 Lane 505, Zhongzheng Rd., Linkou Shiang, Taipei, Taiwan 24445 . R.O.C

Piezo Electric Buzzer

PK-12N40PEDRQ

(RoHS)

DATE:2014.09.18


1 . Electrical Characteristics

VER.:3

Oscillation Frequency (KHz)	4.1 $\pm$ 0.5
Operating Voltage (Vdc)	3.5~ 15
Rated Voltage (Vdc)	12
Current Consumption (mA/max.)	12at Rated Voltage
Sound Pressure Level (dB/min.)	83 at 10cm at Rated Voltage
Tone/Pulse Rate	Constant
LED Colour	Red
Operating Temperature (°C)	-20 ~ +100
Storage Temperature (°C)	-30 ~ +110
Condition by wave (°C)	260 $\pm$ 5°C / within 5sec
Condition by hand (°C)	350 $\pm$ 20°C / within 5sec

2 . Dimensions and Material

2-1Shape

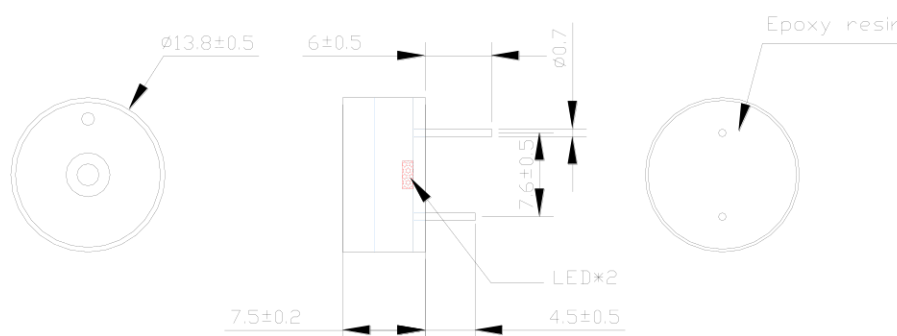

Unit : mm



HITPOINT

TEL: 8862-26013311

FAX: 8862-26013898

NO.4 Lane 505, Zhongzheng Rd., Linkou Shiang, Taipei, Taiwan 24445 . R.O.C

22 Material

Housing	PBT (Color : Hyaline)
Leading Pin	Tin Plated Brass
Weight (Gram)	1.0


3 TESTING METHOD

· *Standard Measurement conditions*

Temperature: $25 \pm 2^\circ\text{C}$ Humidity: 45-60%

· *Acoustic Characteristics*

The oscillation frequency, current consumption and sound pressure are measured by the measuring instruments shown below.

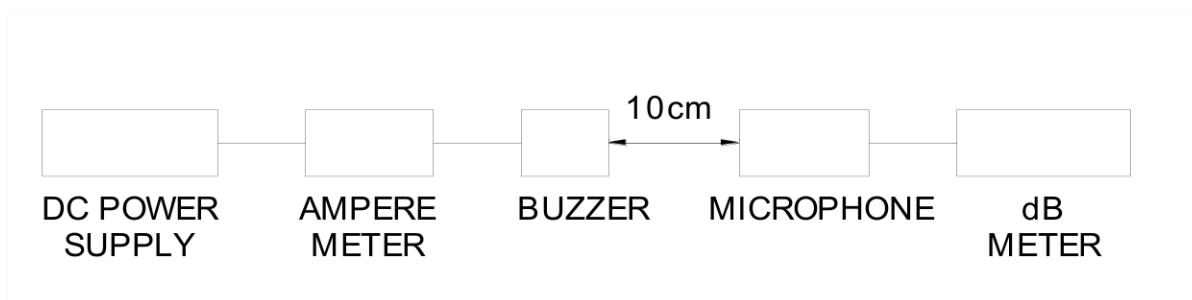



HITPOINT

TEL: 8862-26013311

FAX: 8862-26013898

NO.4 Lane 505, Zhongzheng Rd., Linkou Shiang, Taipei, Taiwan 24445 . R.O.C

4.RELIABILITY

ITEMS	METHOD OF TEST AND MEASUREMENTS	PERFORMANCE
<i>Coldness withstanding</i>	<i>After 98 hours of being exposed to -30 °C environment, should be returned to normal environment for 2 hours, then re-proceed to test.</i>	<i>No abnormality shall exist</i>
<i>Hotness withstanding</i>	<i>After 98 hours of being exposed to +110 °C environment, should be returned to normal environment for 2 hours, then re-proceed to test.</i>	<i>No abnormality shall exist</i>
<i>Humidity withstanding</i>	<i>After 98 hours of being exposed to 40 °C 95%RH environment in actual operation, should be returned to normal environment for 2 hours, then re-proceed to test.</i>	<i>No abnormality shall exist</i>
<i>Durability</i>	<i>Testing after 1,000 hours actual continuous operation.(at standard measurement conditions)</i>	<i>No abnormality shall exist</i>
<i>Drop withstanding</i>	<i>A natural drop from 75cm high down to the ground.</i>	<i>No abnormality shall exist</i>
<i>Vibration withstanding</i>	<i>Vibration of 2,000 cycles per minute, 2mm amplitude, applied in X, Y and Z directions for 30 minutes each.</i>	<i>No abnormality shall exist</i>

5 PACKAGE METHOD

<1> 1600pcs per box , total 4 boxes per carton , total 6400pcs per carton;

Volume: L*W*H=520*335*290mm

<2> N . W . : 3.2KGS ; G . W . : 5.2KGS

< 3 > RoHS Mark