LOUDITY

SPECIFICATION SHEET


| Туре | Unit | LD-BZPG-2412 |
|-----------------------------|------|----------------|
| Rated voltage | V | 12 |
| Operating Voltage | V | 3-16 |
| *Rated Current(MAX) | mA | 8 |
| * Min Sound Output at 30 cm | dB | 90 |
| *Resonant Frequency | Hz | 3700 ± 500 |
| Tone Nature | | single |
| Lead Pin Material | | Red Copper |
| Operating Temperature | ° C | -20 +60 |
| Storage Temperature | ° C | -20 +70 |
| Weight | g | 6 |

*Value Applying at Rated Voltage(DC).

DIMENSIONS

UNIT:mm

Tolerance: ± 0.5 mm

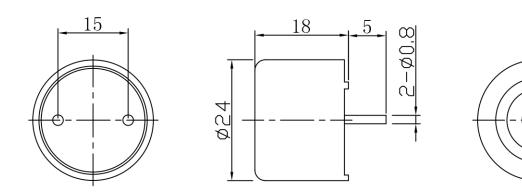

Housing material: ABS Wave solder and wash not allowed.