

UZR

3.95mmL MAX. Chip Type



For SMD



Smaller



Anti-Solvent
Feature

UZR



UZR




- Chip type with 3.95mmLMAX height.
- Designed for surface mounting on high density PC board.
- Applicable to automatic mounting machine fed with carrier tape.
- Compliant to the RoHS directive (2011/65/EU,(EU)2015/863).
- AEC-Q200 compliant. Please contact us for details.


Specifications

Item	Performance Characteristics										
Category Temperature Range	-40 to +85°C										
Rated Voltage Range	4 to 50V										
Rated Capacitance Range	1 to 220μF										
Capacitance Tolerance	±20% at 120Hz, 20°C										
Leakage Current	After 2 minutes' application of rated voltage at 20°C, leakage current is not more than 0.01 CV or 3 (μA) , whichever is greater.										
Tangent of loss angle (tan δ)	Rated voltage (V)	4	6.3	10	16	25	35	50	120Hz 20°C		
	tan δ (MAX.)	0.50	0.30	0.24	0.19	0.16	0.14	0.14			
Stability at Low Temperature	Rated voltage (V)	4	6.3	10	16	25	35	50	120Hz		
	Impedance ratio ZT / Z20 (MAX.)	Z-25°C / Z+20°C	7	4	3	2	2	2			2
		Z-40°C / Z+20°C	15	8	8	4	4	3			3
Endurance	The specifications listed at right shall be met when the capacitors are restored to 20°C after the rated voltage is applied for 1000 hours at 85°C.				Capacitance change		Within ±30% of the initial capacitance value				
					tan δ		300% or less than the initial specified value				
					Leakage current		Less than or equal to the initial specified value				
Shelf Life	After storing the capacitors under no load at 85°C for 1000 hours and then performing voltage treatment based on JIS C 5101-4 clause 4.1 at 20°C, they shall meet the specified values for the endurance characteristics listed above.										
Resistance to soldering heat	The capacitors are kept on a hot plate for 30 seconds, which is maintained at 250°C. The capacitors shall meet the characteristic requirements listed at right when they are removed from the plate and restored to 20°C.				Capacitance change		Within ±10% of the initial capacitance value				
					tan δ		Less than or equal to the initial specified value				
					Leakage current		Less than or equal to the initial specified value				
Marking	Black print on the case top.										

Chip Type

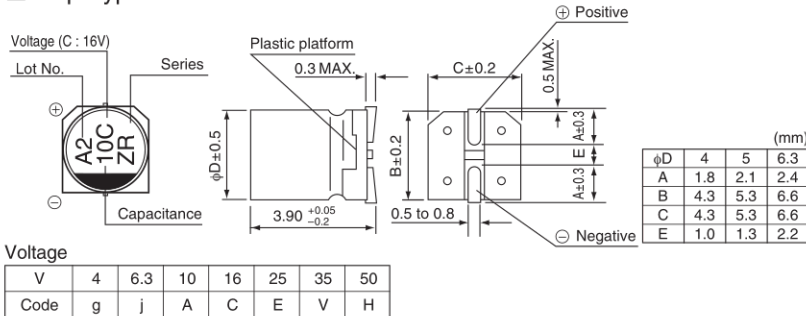

Type numbering system (Example : 16V 10μF)

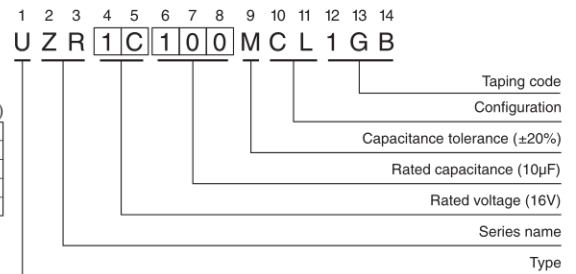

Frequency coefficient of rated ripple current

Frequency	50 Hz	120 Hz	300 Hz	1 kHz	10 kHz or more
Coefficient	0.70	1.00	1.17	1.36	1.50

UZR

■ Dimensions

Rated Voltage (V) (code)	Rated Capacitance (μ F)	Case Size ϕ D \times L (mm)	$\tan \delta$	Leakage Current (μ A) (at 20°C after 2 minutes)	Rated Ripple (mA _{rms}) (85°C/120Hz)	Part Number
4 (0G)	33	4 \times 3.9	0.50	3	28	UZR0G330MCL1GB
	47	4 \times 3.9	0.50	3	33	UZR0G470MCL1GB
	100	5 \times 3.9	0.50	4	56	UZR0G101MCL1GB
	220	6.3 \times 3.9	0.50	8.8	96	UZR0G221MCL1GB
6.3 (0J)	22	4 \times 3.9	0.30	3	28	UZR0J220MCL1GB
	33	5 \times 3.9	0.30	3	37	UZR0J330MCL1GB
	47	5 \times 3.9	0.30	3	45	UZR0J470MCL1GB
	100	6.3 \times 3.9	0.30	6.3	70	UZR0J101MCL1GB
10 (1A)	22	5 \times 3.9	0.24	3	33	UZR1A220MCL1GB
	33	5 \times 3.9	0.24	3.3	41	UZR1A330MCL1GB
	47	6.3 \times 3.9	0.24	4.7	52	UZR1A470MCL1GB
16 (1C)	10	4 \times 3.9	0.19	3	23	UZR1C100MCL1GB
	22	5 \times 3.9	0.19	3.52	37	UZR1C220MCL1GB
	33	6.3 \times 3.9	0.19	5.28	49	UZR1C330MCL1GB
	47	6.3 \times 3.9	0.19	7.52	58	UZR1C470MCL1GB
25 (1E)	4.7	4 \times 3.9	0.16	3	16	UZR1E4R7MCL1GB
	10	5 \times 3.9	0.16	3	27	UZR1E100MCL1GB
	22	6.3 \times 3.9	0.16	5.5	42	UZR1E220MCL1GB
	33	6.3 \times 3.9	0.16	8.25	52	UZR1E330MCL1GB
35 (1V)	4.7	4 \times 3.9	0.14	3	18	UZR1V4R7MCL1GB
	10	5 \times 3.9	0.14	3.5	29	UZR1V100MCL1GB
	22	6.3 \times 3.9	0.14	7.7	46	UZR1V220MCL1GB
50 (1H)	1	4 \times 3.9	0.14	3	8.4	UZR1H010MCL1GB
	2.2	4 \times 3.9	0.14	3	13	UZR1H2R2MCL1GB
	3.3	4 \times 3.9	0.14	3	17	UZR1H3R3MCL1GB
	4.7	5 \times 3.9	0.14	3	20	UZR1H4R7MCL1GB
	10	6.3 \times 3.9	0.14	5	33	UZR1H100MCL1GB

- Taping specifications are given in page 20.
- Recommended land size, soldering by reflow are given in page 16,17.
- Please refer to page 3 for the minimum order quantity.