


UWT Chip Type, Wide Temperature Range





- Chip type operating over wide temperature range of to -55 to $+105^{\circ}\text{C}$.
- Designed for surface mounting on high density PC board.
- Applicable to automatic mounting machine fed with carrier tape.
- Compliant to the RoHS directive (2011/65/EU).



Specifications


Item	Performance Characteristics																									
Category Temperature Range	-55 to $+105^{\circ}\text{C}$																									
Rated Voltage Range	4 to 50V																									
Rated Capacitance Range	1 to $1500\mu\text{F}$																									
Capacitance Tolerance	$\pm 20\%$ at 120Hz, 20°C																									
Leakage Current	After 2 minutes' application of rated voltage at 20°C , leakage current is not more than 0.01CV or $3(\mu\text{A})$, whichever is greater.																									
Tangent of loss angle (tan δ)	<table border="1"> <thead> <tr> <th>Rated voltage (V)</th> <th>4</th> <th>6.3</th> <th>10</th> <th>16</th> <th>25</th> <th>35</th> <th>50</th> </tr> </thead> <tbody> <tr> <td>tan δ (MAX.)</td> <td>0.40</td> <td>0.30</td> <td>0.24</td> <td>0.20</td> <td>0.16</td> <td>0.14</td> <td>0.14</td> </tr> </tbody> </table> <p style="text-align: right;">Measurement frequency : 120Hz at 20°C</p>		Rated voltage (V)	4	6.3	10	16	25	35	50	tan δ (MAX.)	0.40	0.30	0.24	0.20	0.16	0.14	0.14								
Rated voltage (V)	4	6.3	10	16	25	35	50																			
tan δ (MAX.)	0.40	0.30	0.24	0.20	0.16	0.14	0.14																			
Stability at Low Temperature	<table border="1"> <thead> <tr> <th>Rated voltage (V)</th> <th>4</th> <th>6.3</th> <th>10</th> <th>16</th> <th>25</th> <th>35</th> <th>50</th> </tr> </thead> <tbody> <tr> <td>Impedance ratio $Z_{-25^{\circ}\text{C}} / Z_{+20^{\circ}\text{C}}$</td> <td>7</td> <td>4</td> <td>3</td> <td>2</td> <td>2</td> <td>2</td> <td>2</td> </tr> <tr> <td>Z_{T} / Z_{20} (MAX.) $Z_{-40^{\circ}\text{C}} / Z_{+20^{\circ}\text{C}}$</td> <td>15</td> <td>8</td> <td>8</td> <td>4</td> <td>4</td> <td>3</td> <td>3</td> </tr> </tbody> </table> <p style="text-align: right;">Measurement frequency : 120Hz</p>		Rated voltage (V)	4	6.3	10	16	25	35	50	Impedance ratio $Z_{-25^{\circ}\text{C}} / Z_{+20^{\circ}\text{C}}$	7	4	3	2	2	2	2	Z_{T} / Z_{20} (MAX.) $Z_{-40^{\circ}\text{C}} / Z_{+20^{\circ}\text{C}}$	15	8	8	4	4	3	3
Rated voltage (V)	4	6.3	10	16	25	35	50																			
Impedance ratio $Z_{-25^{\circ}\text{C}} / Z_{+20^{\circ}\text{C}}$	7	4	3	2	2	2	2																			
Z_{T} / Z_{20} (MAX.) $Z_{-40^{\circ}\text{C}} / Z_{+20^{\circ}\text{C}}$	15	8	8	4	4	3	3																			
Endurance	The specifications listed at right shall be met when the capacitors are restored to 20°C after the rated voltage is applied for 1000 hours at 105°C .	<table border="1"> <tbody> <tr> <td>Capacitance change</td> <td>Within $\pm 25\%$ of the initial capacitance value for capacitors of $\phi 3\text{mm}$ unit, and 16V or less. Within $\pm 20\%$ of the initial capacitance value for capacitors of 25V or more.</td> </tr> <tr> <td>tan δ</td> <td>200% or less than the initial specified value</td> </tr> <tr> <td>Leakage current</td> <td>Less than or equal to the initial specified value</td> </tr> </tbody> </table>	Capacitance change	Within $\pm 25\%$ of the initial capacitance value for capacitors of $\phi 3\text{mm}$ unit, and 16V or less. Within $\pm 20\%$ of the initial capacitance value for capacitors of 25V or more.	tan δ	200% or less than the initial specified value	Leakage current	Less than or equal to the initial specified value																		
Capacitance change	Within $\pm 25\%$ of the initial capacitance value for capacitors of $\phi 3\text{mm}$ unit, and 16V or less. Within $\pm 20\%$ of the initial capacitance value for capacitors of 25V or more.																									
tan δ	200% or less than the initial specified value																									
Leakage current	Less than or equal to the initial specified value																									
Shelf Life	After storing the capacitors under no load at 105°C for 1000 hours and then performing voltage treatment based on JIS C 5101-4 clause 4.1 at 20°C , they shall meet the specified values for the endurance characteristics listed above.																									
Resistance to soldering heat	The capacitors are kept on a hot plate for 30 seconds, which is maintained at 250°C . The capacitors shall meet the characteristic requirements listed at right when they are removed from the plate and restored to 20°C .	<table border="1"> <tbody> <tr> <td>Capacitance change</td> <td>Within $\pm 10\%$ of the initial capacitance value</td> </tr> <tr> <td>tan δ</td> <td>Less than or equal to the initial specified value</td> </tr> <tr> <td>Leakage current</td> <td>Less than or equal to the initial specified value</td> </tr> </tbody> </table>	Capacitance change	Within $\pm 10\%$ of the initial capacitance value	tan δ	Less than or equal to the initial specified value	Leakage current	Less than or equal to the initial specified value																		
Capacitance change	Within $\pm 10\%$ of the initial capacitance value																									
tan δ	Less than or equal to the initial specified value																									
Leakage current	Less than or equal to the initial specified value																									
Marking	Black print on the case top.																									

Chip Type

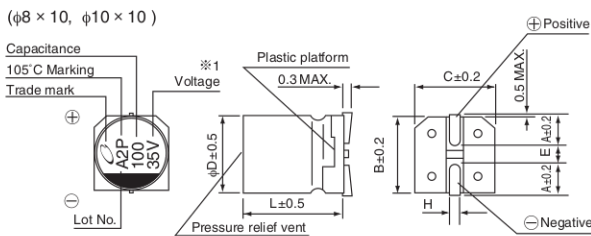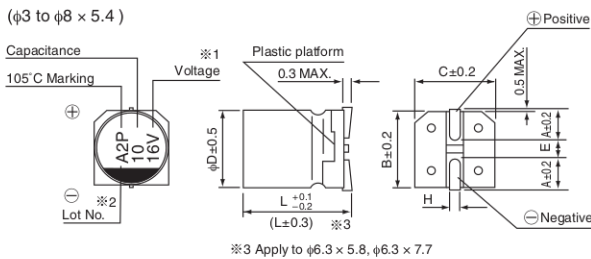

- ※1. Voltage mark for 6.3V is 「6V」. In case of marking for $\phi 3$ units, "V" for rated voltage is omitted.
 ※2. In case of marking for $\phi 3$ units, Lot No is expressed by a digit (month code).

Type numbering system (Example : 16V $10\mu\text{F}$)

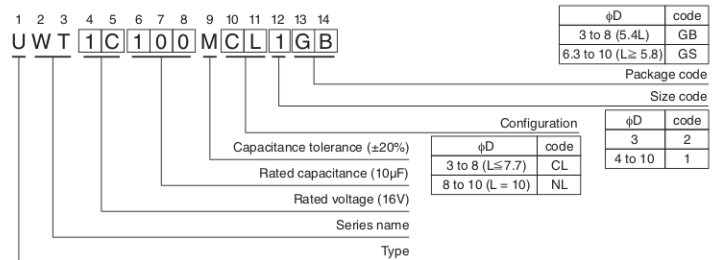

$\phi\text{D} \times \text{L}$	3 × 5.4	4 × 5.4	5 × 5.4	6.3 × 5.4	6.3 × 5.8	6.3 × 7.7	8 × 5.4	8 × 10	10 × 10
A	1.5	1.8	2.1	2.4	2.4	2.4	3.3	2.9	3.2
B	3.3	4.3	5.3	6.6	6.6	6.6	8.3	8.3	10.3
C	3.3	4.3	5.3	6.6	6.6	6.6	8.3	8.3	10.3
E	0.8	1.0	1.3	2.2	2.2	2.2	2.3	3.1	4.5
L	5.4	5.4	5.4	5.4	5.8	7.7	5.4	10	10
H	0.5 to 0.8	0.5 to 0.8	0.5 to 0.8	0.5 to 0.8	0.5 to 0.8	0.5 to 0.8	0.5 to 0.8	0.8 to 1.1	0.8 to 1.1

(mm)

● Dimension table in next page.



■ Dimensions

Cap. (μF)	V Code	4		6.3		10		16		25		35		50		
		0G		0J		1A		1C		1E		1V		1H		
1	010													4 × 5.4 (3)	6.3 (5.9)	
2.2	2R2											3 × 5.4	7.5	4 × 5.4 (3)	11 (9)	
3.3	3R3											3 × 5.4	9	4 × 5.4	14	
4.7	4R7										4 × 5.4 (3)	13 (10)	4 × 5.4	15	5 × 5.4	19
10	100							4 × 5.4 (3)	18 (14)	5 × 5.4	23	5 × 5.4	25	6.3 × 5.4	30	
22	220	4 × 5.4	22	4 × 5.4	22	5 × 5.4	27	5 × 5.4	30	6.3 × 5.4	38	6.3 × 5.4	42	• 8 × 5.4	51 (45)	
33	330	5 × 5.4	30	5 × 5.4	30	5 × 5.4	35	6.3 × 5.4	40	6.3 × 5.4	48	• 8 × 5.4	59 (52)	6.3 × 7.7	60	
47	470	5 × 5.4	36	5 × 5.4	36	6.3 × 5.4	46	6.3 × 5.4	50	• 8 × 5.4	66 (59)	6.3 × 5.8	63	6.3 × 7.7	63	
100	101	6.3 × 5.4	60	6.3 × 5.4	60	6.3 × 5.4	60	6.3 × 5.4	60	6.3 × 7.7	91	6.3 × 7.7	84	8 × 10	140	
150	151	6.3 × 5.8	86	6.3 × 5.8	86	6.3 × 5.8	86	6.3 × 7.7	95	8 × 10	140	8 × 10	155	10 × 10	180	
220	221	• 8 × 5.4	102 (91)	• 8 × 5.4	102 (91)	6.3 × 7.7	105	6.3 × 7.7	105	8 × 10	155	8 × 10	190	10 × 10	220	
330	331	6.3 × 7.7	105	6.3 × 7.7	105	8 × 10	195	8 × 10	195	8 × 10	190	10 × 10	300			
470	471	8 × 10	210	8 × 10	210	8 × 10	210	8 × 10	230	10 × 10	300					
680	681	8 × 10	210	8 × 10	210	10 × 10	310	10 × 10	310							
1000	102	8 × 10	230	8 × 10	230	10 × 10	310							Case size φ D × L (mm)	Rated ripple	
1500	152	10 × 10	310	10 × 10	310											

Rated ripple current (mArms) at 105°C 120Hz

() is also available with φ3mm upon request. In such a case, [2] will be put at 12th digit of type numbering system.

Size φ6.3 × 5.8 is available for capacitors marked. "•" In such a case, [6] will be put at 12th digit of type numbering system.

● Frequency coefficient of rated ripple current

Frequency	50 Hz	120 Hz	300 Hz	1 kHz	10 kHz or more
Coefficient	0.70	1.00	1.17	1.36	1.50

- Taping specifications are given in page 23.
- Recommended land size, soldering by reflow are given in page 18, 19.
- Please select UUX(p.156), UUI(p.162) series if high C/V products are required.
- Please refer to page 3 for the minimum order quantity.