



Schematic



Viewed On Component Side

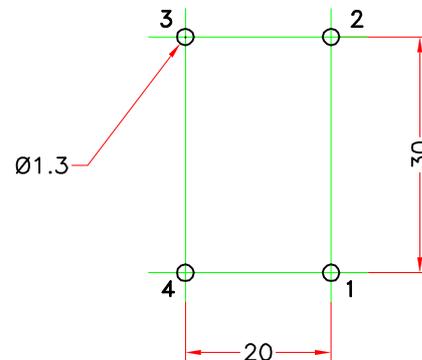

TECHNICAL DATA:

- Core : Toroid \emptyset 25 / \emptyset 15 / H 10 μ i 6000 Ferrite Material
- Wire : \emptyset 0.80 Grade 1 Class F
- Rated Current Per winding : 6A referred to 250V-50Hz and +60°C ambient temperature
- Rated Inductance Per Winding : 1.8mH +50% -30% at 10KHz ; 0.1mA
- Rated DC Per Winding (Typical) : 25m Ω
- Test Voltage Between Windings : 1500VAC - 50Hz
- Climatic Category : DIN GKC (-40 to +125°C; humidity cat. C)
- Case Material : PBT at 30% Fibreglass UL94V0
- Packaging Unit : 336 pieces

RoHS compliance
Please, refer to general catalog for unspecified parameters.

a	
IND	DATE

Radiohm Specification



Designation : 42H32 6000

Part number : _____

Date : 07/12/2011

Preliminary :

Final :

Customer Specification Approval

Part number : _____

Signature : _____

Name : _____

Title : _____

Date : _____