

# General Multilayer Ceramic Capacitors



MLCC is an electronic part that temporarily stores an electrical charge and the most prevalent type of capacitor today. New technologies have enabled the MLCC manufacturers to follow the trend dictated by smaller and smaller electronic devices such as Cellular telephones, Computers, DSC, DVC

## General Features

- Miniature Size
- Wide Capacitance and Voltage Range
- Tape & Reel for Surface Mount Assembly
- Low ESR

## Applications

- General Electronic Circuit

## Part Numbering

**CL** **10** **B** **104** **K** **B** **8** **N** **N** **N** **C**  
① ② ③ ④ ⑤ ⑥ ⑦ ⑧ ⑨ ⑩ ⑪

- |                                          |                            |
|------------------------------------------|----------------------------|
| ① Samsung Multilayer Ceramic Capacitor   | ⑦ Thickness Option         |
| ② Size(mm)                               | ⑧ Product & Plating Method |
| ③ Capacitance Temperature Characteristic | ⑨ Samsung Control Code     |
| ④ Nominal Capacitance                    | ⑩ Reserved For Future Use  |
| ⑤ Capacitance Tolerance                  | ⑪ Packaging Type           |
| ⑥ Rated Voltage                          |                            |

### ① Samsung Multilayer Ceramic Capacitor

### ② SIZE(mm)

| Code | EIA CODE | Size(mm)   |
|------|----------|------------|
| 03   | 0201     | 0.6 × 0.3  |
| 05   | 0402     | 1.0 × 0.5  |
| 10   | 0603     | 1.6 × 0.8  |
| 21   | 0805     | 2.0 × 1.25 |
| 31   | 1206     | 3.2 × 1.6  |
| 32   | 1210     | 3.2 × 2.5  |
| 43   | 1812     | 4.5 × 3.2  |
| 55   | 2220     | 5.7 × 5.0  |

### ③ CAPACITANCE TEMPERATURE CHARACTERISTIC

| Code | Temperature Characteristics |     |     |                                         | Temperature Range               |
|------|-----------------------------|-----|-----|-----------------------------------------|---------------------------------|
| C    | Class I                     | COG | C△  | $0 \pm 30(\text{ppm}/^{\circ}\text{C})$ | $-55 \sim +125^{\circ}\text{C}$ |
| P    |                             | P2H | P△  | $-150 \pm 60$                           |                                 |
| R    |                             | R2H | R△  | $-220 \pm 60$                           |                                 |
| S    |                             | S2H | S△  | $-330 \pm 60$                           |                                 |
| T    |                             | T2H | T△  | $-470 \pm 60$                           |                                 |
| U    |                             | U2J | U△  | $-750 \pm 60$                           |                                 |
| L    |                             | S2L | S△  | $+350 \sim -1000$                       |                                 |
| A    | Class II                    | X5R | X5R | $\pm 15\%$                              | $-55 \sim +85^{\circ}\text{C}$  |
| B    |                             | X7R | X7R | $\pm 15\%$                              | $-55 \sim +125^{\circ}\text{C}$ |
| X    |                             | X6S | X6S | $\pm 22\%$                              | $-55 \sim +105^{\circ}\text{C}$ |
| F    |                             | Y5V | Y5V | $+22 \sim -82\%$                        | $-30 \sim +85^{\circ}\text{C}$  |

#### ※ Temperature Characteristic

| Temperature Characteristics | Below 2.0pF | 2.2 ~ 3.9pF | Above 4.0pF | Above 10pF |
|-----------------------------|-------------|-------------|-------------|------------|
| C△                          | C0G         | C0G         | C0G         | C0G        |
| P△                          | -           | P2J         | P2H         | P2H        |
| R△                          | -           | R2J         | R2H         | R2H        |
| S△                          | -           | S2J         | S2H         | S2H        |
| T△                          | -           | T2J         | T2H         | T2H        |
| U△                          | -           | U2J         | U2J         | U2J        |

J :  $\pm 120\text{PPM}/^{\circ}\text{C}$ , H :  $\pm 60\text{PPM}/^{\circ}\text{C}$ , G :  $\pm 30\text{PPM}/^{\circ}\text{C}$

### ④ NOMINAL CAPACITANCE

Nominal capacitance is identified by 3 digits.

The first and second digits identify the first and second significant figures of the capacitance.

The third digit identifies the multiplier. 'R' identifies a decimal point.

#### ● Example

| Code | Nominal Capacitance                 |
|------|-------------------------------------|
| 1R5  | 1.5pF                               |
| 103  | 10,000pF, 10nF, 0.01 $\mu\text{F}$  |
| 104  | 100,000pF, 100nF, 0.1 $\mu\text{F}$ |

## ⑤ CAPACITANCE TOLERANCE

| Code | Tolerance           | Nominal Capacitance                |
|------|---------------------|------------------------------------|
| A    | $\pm 0.05\text{pF}$ | Less than 10pF<br>(Including 10pF) |
| B    | $\pm 0.1\text{pF}$  |                                    |
| C    | $\pm 0.25\text{pF}$ |                                    |
| D    | $\pm 0.5\text{pF}$  |                                    |
| F    | $\pm 1\text{pF}$    |                                    |
| F    | $\pm 1\%$           | More than 10pF                     |
| G    | $\pm 2\%$           |                                    |
| J    | $\pm 5\%$           |                                    |
| K    | $\pm 10\%$          |                                    |
| M    | $\pm 20\%$          |                                    |
| Z    | +80, -20%           |                                    |

## ⑥ RATED VOLTAGE

| Code | Rated Voltage | Code | Rated Voltage |
|------|---------------|------|---------------|
| R    | 4.0V          | D    | 200V          |
| Q    | 6.3V          | E    | 250V          |
| P    | 10V           | G    | 500V          |
| O    | 16V           | H    | 630V          |
| A    | 25V           | I    | 1,000V        |
| L    | 35V           | J    | 2,000V        |
| B    | 50V           | K    | 3,000V        |
| C    | 100V          |      |               |

## 7 THICKNESS OPTION

| Size       | Code | Thickness(T) | Size       | Code | Thickness(T) |
|------------|------|--------------|------------|------|--------------|
| 0201(0603) | 3    | 0.30±0.03    | 1812(4532) | F    | 1.25±0.20    |
| 0402(1005) | 5    | 0.50±0.05    |            | H    | 1.6±0.20     |
| 0603(1608) | 8    | 0.80±0.10    |            | I    | 2.0±0.20     |
| 0805(2012) | A    | 0.65±0.10    |            | J    | 2.5±0.20     |
|            | C    | 0.85±0.10    |            | L    | 3.2±0.30     |
|            | F    | 1.25±0.10    | 2220(5750) | F    | 1.25±0.20    |
|            | Q    | 1.25±0.15    |            | H    | 1.6±0.20     |
|            | Y    | 1.25±0.20    |            | I    | 2.0±0.20     |
| 1206(3216) | C    | 0.85±0.15    |            | J    | 2.5±0.20     |
|            | F    | 1.25±0.15    |            | L    | 3.2±0.30     |
|            | H    | 1.6±0.20     |            |      |              |
| 1210(3225) | F    | 1.25±0.20    |            |      |              |
|            | H    | 1.6±0.20     |            |      |              |
|            | I    | 2.0±0.20     |            |      |              |
|            | J    | 2.5±0.20     |            |      |              |
|            | V    | 2.5±0.30     |            |      |              |

## 8 PRODUCT & PLATING METHOD

| Code | Electrode | Termination | Plating Type |
|------|-----------|-------------|--------------|
| A    | Pd        | Ag          | Sn_100%      |
| N    | Ni        | Cu          | Sn_100%      |
| G    | Cu        | Cu          | Sn_100%      |

## 9 SAMSUNG CONTROL CODE

| Code | Description of the code | Code | Description of the code |
|------|-------------------------|------|-------------------------|
| A    | Array (2-element)       | N    | Normal                  |
| B    | Array (4-element)       | P    | Automotive              |
| C    | High - Q                | L    | LICC                    |


## ⑩ RESERVED FOR FUTURE USE

| Code | Description of the code |
|------|-------------------------|
| N    | Reserved for future use |

## ⑪ PACKAGING TYPE

| Code | Packaging Type       | Code | Packaging Type           |
|------|----------------------|------|--------------------------|
| B    | Bulk                 | F    | Embossing 13" (10,000EA) |
| P    | Bulk Case            | L    | Paper 13" (15,000EA)     |
| C    | Paper 7"             | O    | Paper 10"                |
| D    | Paper 13" (10,000EA) | S    | Embossing 10"            |
| E    | Embossing 7"         |      |                          |

## APPEARANCE AND DIMENSION


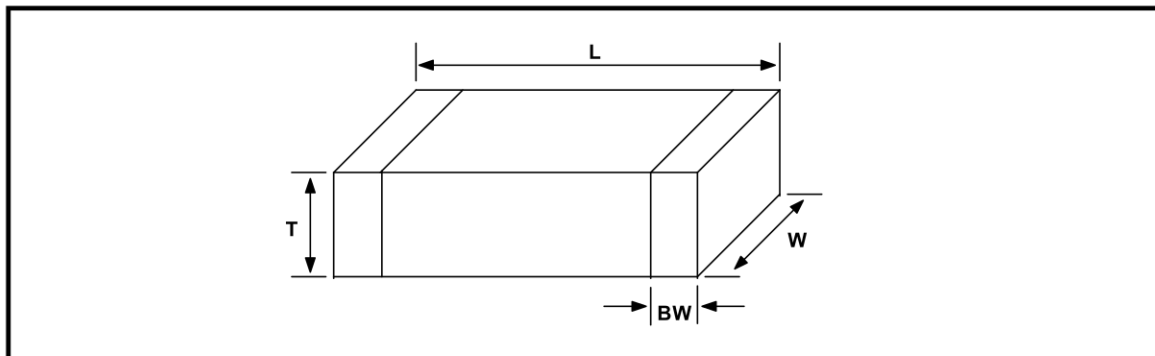


| CODE | EIA CODE | DIMENSION ( mm ) |            |         |                |
|------|----------|------------------|------------|---------|----------------|
|      |          | L                | W          | T (MAX) | BW             |
| 03   | 0201     | 0.6 ± 0.03       | 0.3 ± 0.03 | 0.33    | 0.15 ± 0.05    |
| 05   | 0402     | 1.0 ± 0.05       | 0.5 ± 0.05 | 0.55    | 0.2 +0.15/-0.1 |
| 10   | 0603     | 1.6 ± 0.1        | 0.8 ± 0.1  | 0.9     | 0.3 ± 0.2      |
| 21   | 0805     | 2.0 ± 0.1        | 1.25 ± 0.1 | 1.35    | 0.5 +0.2/-0.3  |
| 31   | 1206     | 3.2 ± 0.15       | 1.6 ± 0.15 | 1.40    | 0.5 +0.2/-0.3  |
|      |          | 3.2 ± 0.2        | 1.6 ± 0.2  | 1.8     | 0.5 +0.3/-0.3  |
| 32   | 1210     | 3.2 ± 0.3        | 2.5 ± 0.2  | 2.7     | 0.6 ± 0.3      |
|      |          | 3.2 ± 0.4        | 2.5 ± 0.3  | 2.8     |                |
| 43   | 1812     | 4.5 ± 0.4        | 3.2 ± 0.3  | 3.5     | 0.8 ± 0.3      |
| 55   | 2220     | 5.7 ± 0.4        | 5.0 ± 0.4  | 3.5     | 1.0 ± 0.3      |


## RELIABILITY TEST CONDITION

| NO | ITEM                  |          | PERFORMANCE                                                                                                                | TEST CONDITION                                                                                                                              |            |              |
|----|-----------------------|----------|----------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------|------------|--------------|
| 1  | Appearance            |          | No Abnormal Exterior Appearance                                                                                            | Through Microscope(×10)                                                                                                                     |            |              |
| 2  | Insulation Resistance |          | 10,000MΩ or 500MΩ·μF whichever is smaller<br><br>Rated Voltage is below 16V ;<br>10,000MΩ or 100MΩ·μF whichever is smaller | Apply the Rated Voltage For 60 ~ 120 Sec.                                                                                                   |            |              |
| 3  | Withstanding Voltage  |          | No Dielectric Breakdown or Mechanical Breakdown                                                                            | Class I : 300% of the Rated Voltage for 1~5 sec.<br>Class II :250% of the Rated Voltage for 1~5 sec. is applied with less than 50mA current |            |              |
| 4  | Capacitance           | Class I  | Within the specified tolerance                                                                                             | Capacitance                                                                                                                                 | Frequency  | Voltage      |
|    |                       |          |                                                                                                                            | ≤ 1,000 pF                                                                                                                                  | 1MHz ±10%  | 0.5 ~ 5 Vrms |
|    |                       |          |                                                                                                                            | >1,000 pF                                                                                                                                   | 1kHz ±10%  |              |
|    |                       | Class II | Within the specified tolerance                                                                                             | Capacitance                                                                                                                                 | Frequency  | Voltage      |
|    |                       |          |                                                                                                                            | ≤ 10 μF                                                                                                                                     | 1kHz ±10%  | 1.0±0.2Vrms  |
|    |                       |          |                                                                                                                            | >10 μF                                                                                                                                      | 120Hz ±20% | 0.5±0.1Vrms  |
| 5  | Q                     | Class I  | Capacitance ≥ 30pF : Q ≥ 1,000<br>                                                                                         |                                                                                                                                             |            |              |

## RELIABILITY TEST CONDITION
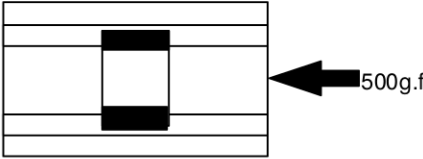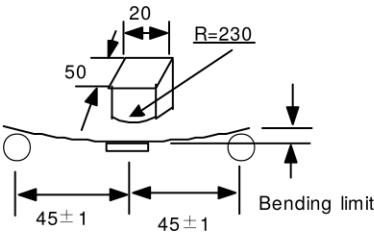
| NO                               | ITEM                                                                                                                                                                                                                    |                                 | PERFORMANCE                                                                                                                                                                                                                                                                                                                                                     |                                             | TEST CONDITION                    |                                                                                                                                                                                                                                   |        |        |        |             |                                                                                                                                                                                                                                |           |    |           |    |           |    |            |    |              |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |      |           |   |        |   |                          |   |        |   |                         |   |        |
|----------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------|-----------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------|--------|--------|-------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------|----|-----------|----|-----------|----|------------|----|--------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------|-----------|---|--------|---|--------------------------|---|--------|---|-------------------------|---|--------|
| 7                                | Temperature Characteristics of Capacitance                                                                                                                                                                              | Class I                         | <table><tr><th>Characteristics</th><th>Temp. Coefficient (PPM/°C)</th></tr><tr><td>C0G</td><td>0 ± 30</td></tr><tr><td>PH</td><td>-150 ± 60</td></tr><tr><td>RH</td><td>-220 ± 60</td></tr><tr><td>SH</td><td>-330 ± 60</td></tr><tr><td>TH</td><td>-470 ± 60</td></tr><tr><td>UL</td><td>-750 ± 120</td></tr><tr><td>SL</td><td>+350 ~ -1000</td></tr></table> |                                             | Characteristics                   | Temp. Coefficient (PPM/°C)                                                                                                                                                                                                        | C0G    | 0 ± 30 | PH     | -150 ± 60   | RH                                                                                                                                                                                                                             | -220 ± 60 | SH | -330 ± 60 | TH | -470 ± 60 | UL | -750 ± 120 | SL | +350 ~ -1000 | <table><tr><th>Step</th><th>Temp.(°C)</th></tr><tr><td>1</td><td>25 ± 2</td></tr><tr><td>2</td><td>Min. operating temp. ± 2</td></tr><tr><td>3</td><td>25 ± 2</td></tr><tr><td>4</td><td>Max. operating temp ± 2</td></tr><tr><td>5</td><td>25 ± 2</td></tr></table> <p>(1) Class I</p> <p>Temperature Coefficient shall be calculated from the formula as below.</p> <p>Temp. Coefficient = <math>\frac{C2 - C1}{C1 \times \Delta T} \times 10^6</math> [ppm/°C]</p> <p>C1; Capacitance at step 3</p> <p>C2: Capacitance at 85 °C</p> <p>ΔT: 60 °C(=85 °C-25 °C)</p> | Step | Temp.(°C) | 1 | 25 ± 2 | 2 | Min. operating temp. ± 2 | 3 | 25 ± 2 | 4 | Max. operating temp ± 2 | 5 | 25 ± 2 |
|                                  |                                                                                                                                                                                                                         |                                 | Characteristics                                                                                                                                                                                                                                                                                                                                                 | Temp. Coefficient (PPM/°C)                  |                                   |                                                                                                                                                                                                                                   |        |        |        |             |                                                                                                                                                                                                                                |           |    |           |    |           |    |            |    |              |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |      |           |   |        |   |                          |   |        |   |                         |   |        |
|                                  |                                                                                                                                                                                                                         |                                 | C0G                                                                                                                                                                                                                                                                                                                                                             | 0 ± 30                                      |                                   |                                                                                                                                                                                                                                   |        |        |        |             |                                                                                                                                                                                                                                |           |    |           |    |           |    |            |    |              |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |      |           |   |        |   |                          |   |        |   |                         |   |        |
|                                  |                                                                                                                                                                                                                         |                                 | PH                                                                                                                                                                                                                                                                                                                                                              | -150 ± 60                                   |                                   |                                                                                                                                                                                                                                   |        |        |        |             |                                                                                                                                                                                                                                |           |    |           |    |           |    |            |    |              |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |      |           |   |        |   |                          |   |        |   |                         |   |        |
| RH                               | -220 ± 60                                                                                                                                                                                                               |                                 |                                                                                                                                                                                                                                                                                                                                                                 |                                             |                                   |                                                                                                                                                                                                                                   |        |        |        |             |                                                                                                                                                                                                                                |           |    |           |    |           |    |            |    |              |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |      |           |   |        |   |                          |   |        |   |                         |   |        |
| SH                               | -330 ± 60                                                                                                                                                                                                               |                                 |                                                                                                                                                                                                                                                                                                                                                                 |                                             |                                   |                                                                                                                                                                                                                                   |        |        |        |             |                                                                                                                                                                                                                                |           |    |           |    |           |    |            |    |              |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |      |           |   |        |   |                          |   |        |   |                         |   |        |
| TH                               | -470 ± 60                                                                                                                                                                                                               |                                 |                                                                                                                                                                                                                                                                                                                                                                 |                                             |                                   |                                                                                                                                                                                                                                   |        |        |        |             |                                                                                                                                                                                                                                |           |    |           |    |           |    |            |    |              |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |      |           |   |        |   |                          |   |        |   |                         |   |        |
| UL                               | -750 ± 120                                                                                                                                                                                                              |                                 |                                                                                                                                                                                                                                                                                                                                                                 |                                             |                                   |                                                                                                                                                                                                                                   |        |        |        |             |                                                                                                                                                                                                                                |           |    |           |    |           |    |            |    |              |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |      |           |   |        |   |                          |   |        |   |                         |   |        |
| SL                               | +350 ~ -1000                                                                                                                                                                                                            |                                 |                                                                                                                                                                                                                                                                                                                                                                 |                                             |                                   |                                                                                                                                                                                                                                   |        |        |        |             |                                                                                                                                                                                                                                |           |    |           |    |           |    |            |    |              |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |      |           |   |        |   |                          |   |        |   |                         |   |        |
| Step                             | Temp.(°C)                                                                                                                                                                                                               |                                 |                                                                                                                                                                                                                                                                                                                                                                 |                                             |                                   |                                                                                                                                                                                                                                   |        |        |        |             |                                                                                                                                                                                                                                |           |    |           |    |           |    |            |    |              |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |      |           |   |        |   |                          |   |        |   |                         |   |        |
| 1                                | 25 ± 2                                                                                                                                                                                                                  |                                 |                                                                                                                                                                                                                                                                                                                                                                 |                                             |                                   |                                                                                                                                                                                                                                   |        |        |        |             |                                                                                                                                                                                                                                |           |    |           |    |           |    |            |    |              |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |      |           |   |        |   |                          |   |        |   |                         |   |        |
| 2                                | Min. operating temp. ± 2                                                                                                                                                                                                |                                 |                                                                                                                                                                                                                                                                                                                                                                 |                                             |                                   |                                                                                                                                                                                                                                   |        |        |        |             |                                                                                                                                                                                                                                |           |    |           |    |           |    |            |    |              |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |      |           |   |        |   |                          |   |        |   |                         |   |        |
| 3                                | 25 ± 2                                                                                                                                                                                                                  |                                 |                                                                                                                                                                                                                                                                                                                                                                 |                                             |                                   |                                                                                                                                                                                                                                   |        |        |        |             |                                                                                                                                                                                                                                |           |    |           |    |           |    |            |    |              |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |      |           |   |        |   |                          |   |        |   |                         |   |        |
| 4                                | Max. operating temp ± 2                                                                                                                                                                                                 |                                 |                                                                                                                                                                                                                                                                                                                                                                 |                                             |                                   |                                                                                                                                                                                                                                   |        |        |        |             |                                                                                                                                                                                                                                |           |    |           |    |           |    |            |    |              |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |      |           |   |        |   |                          |   |        |   |                         |   |        |
| 5                                | 25 ± 2                                                                                                                                                                                                                  |                                 |                                                                                                                                                                                                                                                                                                                                                                 |                                             |                                   |                                                                                                                                                                                                                                   |        |        |        |             |                                                                                                                                                                                                                                |           |    |           |    |           |    |            |    |              |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |      |           |   |        |   |                          |   |        |   |                         |   |        |
| Class II                         | <table><tr><th>Characteristics</th><th>Capacitance Change with No Bias</th></tr><tr><td>A(X5R)/B(X7R)</td><td>± 15%</td></tr><tr><td>X(X6S)</td><td>± 22%</td></tr><tr><td>F(Y5V)</td><td>+22% ~ -82%</td></tr></table> |                                 | Characteristics                                                                                                                                                                                                                                                                                                                                                 | Capacitance Change with No Bias             | A(X5R)/B(X7R)                     | ± 15%                                                                                                                                                                                                                             | X(X6S) | ± 22%  | F(Y5V) | +22% ~ -82% | <p>(2) CLASS II</p> <p>Capacitance Change shall be calculated from the formula as below.</p> <p>ΔC = <math>\frac{C2 - C1}{C1} \times 100(\%)</math></p> <p>C1; Capacitance at step 3</p> <p>C2: Capacitance at step 2 or 4</p> |           |    |           |    |           |    |            |    |              |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |      |           |   |        |   |                          |   |        |   |                         |   |        |
|                                  | Characteristics                                                                                                                                                                                                         | Capacitance Change with No Bias |                                                                                                                                                                                                                                                                                                                                                                 |                                             |                                   |                                                                                                                                                                                                                                   |        |        |        |             |                                                                                                                                                                                                                                |           |    |           |    |           |    |            |    |              |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |      |           |   |        |   |                          |   |        |   |                         |   |        |
|                                  | A(X5R)/B(X7R)                                                                                                                                                                                                           | ± 15%                           |                                                                                                                                                                                                                                                                                                                                                                 |                                             |                                   |                                                                                                                                                                                                                                   |        |        |        |             |                                                                                                                                                                                                                                |           |    |           |    |           |    |            |    |              |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |      |           |   |        |   |                          |   |        |   |                         |   |        |
| X(X6S)                           | ± 22%                                                                                                                                                                                                                   |                                 |                                                                                                                                                                                                                                                                                                                                                                 |                                             |                                   |                                                                                                                                                                                                                                   |        |        |        |             |                                                                                                                                                                                                                                |           |    |           |    |           |    |            |    |              |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |      |           |   |        |   |                          |   |        |   |                         |   |        |
| F(Y5V)                           | +22% ~ -82%                                                                                                                                                                                                             |                                 |                                                                                                                                                                                                                                                                                                                                                                 |                                             |                                   |                                                                                                                                                                                                                                   |        |        |        |             |                                                                                                                                                                                                                                |           |    |           |    |           |    |            |    |              |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |      |           |   |        |   |                          |   |        |   |                         |   |        |
| Adhesive Strength of Termination | No Indication Of Peeling Shall Occur On The Terminal Electrode.                                                                                                                                                         |                                 | <p>Apply 500g.f * Pressure for 10± 1 sec.</p> <p>* 200g.f for 0201 case size.</p>                                                                                                                                                                                           |                                             |                                   |                                                                                                                                                                                                                                   |        |        |        |             |                                                                                                                                                                                                                                |           |    |           |    |           |    |            |    |              |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |      |           |   |        |   |                          |   |        |   |                         |   |        |
|                                  | 9                                                                                                                                                                                                                       | Bending Strength                |                                                                                                                                                                                                                                                                                                                                                                 | Apperance                                   | No mechanical damage shall occur. | <p>Bending limit ; 1mm</p> <p>Test speed ; 1.0mm/SEC.</p> <p>Keep the test board at the limit point in 5 sec., Then measure capacitance.</p>  |        |        |        |             |                                                                                                                                                                                                                                |           |    |           |    |           |    |            |    |              |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |      |           |   |        |   |                          |   |        |   |                         |   |        |
| Capacitance                      |                                                                                                                                                                                                                         |                                 | Characteristics                                                                                                                                                                                                                                                                                                                                                 | Capacitance Change                          |                                   |                                                                                                                                                                                                                                   |        |        |        |             |                                                                                                                                                                                                                                |           |    |           |    |           |    |            |    |              |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |      |           |   |        |   |                          |   |        |   |                         |   |        |
|                                  |                                                                                                                                                                                                                         |                                 | Class I                                                                                                                                                                                                                                                                                                                                                         | Within ± 5% or ± 0.5 pF whichever is larger |                                   |                                                                                                                                                                                                                                   |        |        |        |             |                                                                                                                                                                                                                                |           |    |           |    |           |    |            |    |              |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |      |           |   |        |   |                          |   |        |   |                         |   |        |
|                                  |                                                                                                                                                                                                                         |                                 | Class II                                                                                                                                                                                                                                                                                                                                                        | A(X5R)/B(X7R)/X(X6S)                        | Within ± 12.5%                    |                                                                                                                                                                                                                                   |        |        |        |             |                                                                                                                                                                                                                                |           |    |           |    |           |    |            |    |              |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |      |           |   |        |   |                          |   |        |   |                         |   |        |
|                                  |                                                                                                                                                                                                                         | F(Y5V)                          | Within ± 30%                                                                                                                                                                                                                                                                                                                                                    |                                             |                                   |                                                                                                                                                                                                                                   |        |        |        |             |                                                                                                                                                                                                                                |           |    |           |    |           |    |            |    |              |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |      |           |   |        |   |                          |   |        |   |                         |   |        |

## RELIABILITY TEST CONDITION
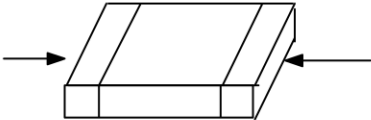
| NO | ITEM                         |                 | PERFORMANCE                                                                                                                                                                                     |                | TEST CONDITION                               |                           |                                                                                                                                                                      |  |      |          |            |   |        |    |   |         |    |
|----|------------------------------|-----------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------|----------------------------------------------|---------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------|--|------|----------|------------|---|--------|----|---|---------|----|
| 10 | Solderability                |                 | More Than 75% of the terminal surface is to be soldered newly, So metal part does not come out or dissolve<br> |                | Solder                                       | Sn-3Ag-0.5Cu              | 63Sn-37Pb                                                                                                                                                            |  |      |          |            |   |        |    |   |         |    |
|    |                              |                 |                                                                                                                                                                                                 |                | Solder Temp.                                 | 245±5℃                    | 235±5℃                                                                                                                                                               |  |      |          |            |   |        |    |   |         |    |
|    |                              |                 |                                                                                                                                                                                                 |                | Flux                                         | RMA Type                  |                                                                                                                                                                      |  |      |          |            |   |        |    |   |         |    |
|    |                              |                 |                                                                                                                                                                                                 |                | Dip Time                                     | 3±0.3 sec.                | 5±0.5 sec.                                                                                                                                                           |  |      |          |            |   |        |    |   |         |    |
|    |                              |                 |                                                                                                                                                                                                 |                | Pre-heating                                  | at 80~120℃ for 10~30 sec. |                                                                                                                                                                      |  |      |          |            |   |        |    |   |         |    |
|    |                              |                 |                                                                                                                                                                                                 |                |                                              |                           |                                                                                                                                                                      |  |      |          |            |   |        |    |   |         |    |
| 11 | Resistance to Soldering heat | Apperance       | No mechanical damage shall occur.                                                                                                                                                               |                | Solder Temperature : 270±5℃                  |                           |                                                                                                                                                                      |  |      |          |            |   |        |    |   |         |    |
|    |                              | Capacitance     | Characteristics                                                                                                                                                                                 |                | Capacitance Change                           |                           | Dip Time : 10±1 sec.                                                                                                                                                 |  |      |          |            |   |        |    |   |         |    |
|    |                              |                 | Class I                                                                                                                                                                                         |                | Within ±2.5% or ±0.25 pF whichever is larger |                           | Each termination shall be fully immersed and preheated as below :                                                                                                    |  |      |          |            |   |        |    |   |         |    |
|    |                              |                 | Class II                                                                                                                                                                                        | A(X5R)/ B(X7R) | Within ±7.5%                                 |                           | <table><tr><th>STEP</th><th>TEMP.(℃)</th><th>TIME(SEC.)</th></tr><tr><td>1</td><td>80~100</td><td>60</td></tr><tr><td>2</td><td>150~180</td><td>60</td></tr></table> |  | STEP | TEMP.(℃) | TIME(SEC.) | 1 | 80~100 | 60 | 2 | 150~180 | 60 |
|    |                              |                 |                                                                                                                                                                                                 | STEP           | TEMP.(℃)                                     | TIME(SEC.)                |                                                                                                                                                                      |  |      |          |            |   |        |    |   |         |    |
|    |                              |                 |                                                                                                                                                                                                 | 1              | 80~100                                       | 60                        |                                                                                                                                                                      |  |      |          |            |   |        |    |   |         |    |
|    |                              | 2               | 150~180                                                                                                                                                                                         | 60             |                                              |                           |                                                                                                                                                                      |  |      |          |            |   |        |    |   |         |    |
|    |                              | X(X6S)          | Within ±15%                                                                                                                                                                                     |                |                                              |                           |                                                                                                                                                                      |  |      |          |            |   |        |    |   |         |    |
|    |                              | F               | Within ±20%                                                                                                                                                                                     |                |                                              |                           |                                                                                                                                                                      |  |      |          |            |   |        |    |   |         |    |
|    |                              | Q<br>(Class I ) | Capacitance ≥ 30pF : Q≥ 1000<br><30pF : Q≥ 400+20×C<br>                                                                                                                                         |                |                                              |                           |                                                                                                                                                                      |  |      |          |            |   |        |    |   |         |    |

## RELIABILITY TEST CONDITION

| NO                              | ITEM                                                                                                                                                      |                                                                                                                                               | PERFORMANCE                                                                                                                                               |                                                                                                                                               | TEST CONDITION                                                                                                                                                                                                                                                                       |
|---------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 13                              | Humidity<br>(Steady<br>State)                                                                                                                             | Appearance                                                                                                                                    | No mechanical damage shall occur.                                                                                                                         |                                                                                                                                               | Temperature : 40±2 ℃<br>Relative humidity : 90~95 %RH<br>Duration time : 500 +12/-0 hr.<br><br>Leave the capacitor in ambient<br>condition for specified time* before<br>measurement.<br>CLASS I : 24±2 Hr.<br>CLASS II : 24±2 Hr.                                                   |
|                                 |                                                                                                                                                           | Capacitance                                                                                                                                   | Characteristics                                                                                                                                           |                                                                                                                                               | Capacitance Change                                                                                                                                                                                                                                                                   |
|                                 |                                                                                                                                                           |                                                                                                                                               | Class I                                                                                                                                                   |                                                                                                                                               | Within ±5.0% or ±0.5pF<br>whichever is larger                                                                                                                                                                                                                                        |
|                                 |                                                                                                                                                           |                                                                                                                                               | Class II                                                                                                                                                  | A(X5R)/<br>B(X7R)/<br>X(X6S)                                                                                                                  | Within ±12.5%                                                                                                                                                                                                                                                                        |
|                                 |                                                                                                                                                           |                                                                                                                                               |                                                                                                                                                           | F(Y5V)                                                                                                                                        | Within ±30%                                                                                                                                                                                                                                                                          |
|                                 |                                                                                                                                                           | Q<br>CLASS I                                                                                                                                  | Capacitance ≥ 30pF : Q≥ 350<br>10≤ Capacitance <30pF : Q≥ 275 + 2.5×C<br>Capacitance < 10pF : Q≥ 200 + 10×C (C: Capacitance)                              |                                                                                                                                               |                                                                                                                                                                                                                                                                                      |
| Tan δ<br>CLASS II               | 1. Characteristic : A(X5R),<br>B(X7R)<br>0.05max (16V and over)<br>0.075max (10V)<br>0.075max<br>(6.3V except Table 1)<br>0.125max*<br>(refer to Table 1) | 2. Characteristic : F(Y5V)<br>0.075max (25V and over)<br>0.1max (16V, C<1.0μF)<br>0.125max(16V, C≥ 1.0μF)<br>0.15max (10V)<br>0.195max (6.3V) |                                                                                                                                                           |                                                                                                                                               |                                                                                                                                                                                                                                                                                      |
| Insulation<br>Resistance        | 1,000 MΩ or 50MΩ·μF whichever is smaller.                                                                                                                 |                                                                                                                                               |                                                                                                                                                           |                                                                                                                                               |                                                                                                                                                                                                                                                                                      |
| 14                              | Moisture<br>Resistance                                                                                                                                    | Appearance                                                                                                                                    | No mechanical damage shall occur.                                                                                                                         |                                                                                                                                               | Applied Voltage : rated voltage<br>Temperature : 40±2 ℃<br>Humidity : :90~95%RH<br>Duration Time : 500 +12/-0 Hr.<br>Charge/Discharge Current : 50mA max.<br><br>Perform the initial measurement according to<br>Note1 .<br><br>Perform the final measurement according to<br>Note2. |
|                                 |                                                                                                                                                           | Capacitance                                                                                                                                   | Characteristics                                                                                                                                           |                                                                                                                                               | Capacitance Change                                                                                                                                                                                                                                                                   |
|                                 |                                                                                                                                                           |                                                                                                                                               | Class I                                                                                                                                                   |                                                                                                                                               | Within ±5.0% or ±0.5pF<br>whichever is larger                                                                                                                                                                                                                                        |
|                                 |                                                                                                                                                           |                                                                                                                                               | Class II                                                                                                                                                  | A(X5R)/<br>B(X7R)/<br>X(X6S)                                                                                                                  | Within ±12.5%<br>Within ±12.5%<br>Within ±30%                                                                                                                                                                                                                                        |
|                                 |                                                                                                                                                           |                                                                                                                                               |                                                                                                                                                           | F(Y5V)                                                                                                                                        | Within ±30%                                                                                                                                                                                                                                                                          |
|                                 |                                                                                                                                                           |                                                                                                                                               |                                                                                                                                                           |                                                                                                                                               | Within ±30%                                                                                                                                                                                                                                                                          |
|                                 |                                                                                                                                                           | Q<br>(Class I )                                                                                                                               | Capacitance ≥ 30pF : Q≥ 200<br>Capacitance <30pF : Q≥ 100 + 10/3×C (C: Capacitance)                                                                       |                                                                                                                                               |                                                                                                                                                                                                                                                                                      |
|                                 |                                                                                                                                                           | Tan δ<br>(Class II )                                                                                                                          | 1. Characteristic : A(X5R),<br>B(X7R)<br>0.05max (16V and over)<br>0.075max (10V)<br>0.075max<br>(6.3V except Table 1)<br>0.125max*<br>(refer to Table 1) | 2. Characteristic : F(Y5V)<br>0.075max (25V and over)<br>0.1max (16V, C<1.0μF)<br>0.125max(16V, C≥ 1.0μF)<br>0.15max (10V)<br>0.195max (6.3V) |                                                                                                                                                                                                                                                                                      |
| X(X6S) 0.11max (6.3V and below) |                                                                                                                                                           |                                                                                                                                               |                                                                                                                                                           |                                                                                                                                               |                                                                                                                                                                                                                                                                                      |
| Insulation<br>Resistance        | 500 MΩ or 25MΩ·μF whichever is smaller.                                                                                                                   |                                                                                                                                               |                                                                                                                                                           |                                                                                                                                               |                                                                                                                                                                                                                                                                                      |

## RELIABILITY TEST CONDITION

| NO                    | ITEM                                      |                  | PERFORMANCE                                                                                                                                                   |                | TEST CONDITION                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |                                                                                                                                                     |           |            |   |                           |    |   |    |     |   |                           |    |   |    |     |
|-----------------------|-------------------------------------------|------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------|-----------|------------|---|---------------------------|----|---|----|-----|---|---------------------------|----|---|----|-----|
| 15                    | High Temperature Resistance               | Appearance       | No mechanical damage shall occur.                                                                                                                             |                | Applied Voltage : 200%* of the rated voltage<br>Temperature : max. operating temperature<br>Duration Time : 1000 +48/-0 Hr.<br>Charge/Discharge Current : 50mA max.<br><br>* refer to table(3) : 150%/100% of the rated voltage<br><br>Perform the initial measurement according to Note1 for Class II<br><br>Perform the final measurement according to Note2.                                                                                                                                               |                                                                                                                                                     |           |            |   |                           |    |   |    |     |   |                           |    |   |    |     |
|                       |                                           | Capacitance      | Characteristics                                                                                                                                               |                |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               | Capacitance Change                                                                                                                                  |           |            |   |                           |    |   |    |     |   |                           |    |   |    |     |
|                       |                                           |                  | Class I                                                                                                                                                       |                |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               | Within ±3% or ±0.3pF, Whichever is larger                                                                                                           |           |            |   |                           |    |   |    |     |   |                           |    |   |    |     |
|                       |                                           |                  | Class II                                                                                                                                                      | A(X5R)/B(X7R)  |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               | Within ±12.5%                                                                                                                                       |           |            |   |                           |    |   |    |     |   |                           |    |   |    |     |
|                       |                                           |                  |                                                                                                                                                               | X(X6S)         |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               | Within ±25%                                                                                                                                         |           |            |   |                           |    |   |    |     |   |                           |    |   |    |     |
|                       |                                           |                  |                                                                                                                                                               | F(Y5V)         |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               | Within ±30%                                                                                                                                         |           |            |   |                           |    |   |    |     |   |                           |    |   |    |     |
|                       |                                           |                  |                                                                                                                                                               |                |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               | Within ±30%                                                                                                                                         |           |            |   |                           |    |   |    |     |   |                           |    |   |    |     |
|                       |                                           | Q (Class I)      | Capacitance ≥30pF : Q ≥ 350<br>10≤ Capacitance <30 pF : Q ≥ 275 + 2.5×C<br>Capacitance < 10pF :Q ≥ 200 +10×C (C: Capacitance)                                 |                |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |                                                                                                                                                     |           |            |   |                           |    |   |    |     |   |                           |    |   |    |     |
|                       |                                           | Tan δ (Class II) | 1. Characteristic : A(X5R), B(X7R)<br><br>0.05max<br>(16V and over)<br>0.075max (10V)<br>0.075max<br>(6.3V except Table 1)<br>0.125max*<br>(refer to Table 1) |                |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               | 2. Characteristic : F(Y5V)<br><br>0.075max<br>(25V and over)<br>0.1max(16V, C<1.0μF)<br>0.125max(16V, C≥ 1.0μF)<br>0.15max (10V)<br>0.195max (6.3V) |           |            |   |                           |    |   |    |     |   |                           |    |   |    |     |
|                       |                                           |                  | X(X6S) 0.11max (6.3V and below)                                                                                                                               |                |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |                                                                                                                                                     |           |            |   |                           |    |   |    |     |   |                           |    |   |    |     |
| Insulation Resistance | 1,000 MΩ or 50MΩ·μF whichever is smaller. |                  |                                                                                                                                                               |                |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |                                                                                                                                                     |           |            |   |                           |    |   |    |     |   |                           |    |   |    |     |
| 16                    | Temperature Cycle                         | Appearance       | No mechanical damage shall occur.                                                                                                                             |                | Capacitor shall be subjected to 5 cycles.<br>Condition for 1 cycle : <table><tr><td>Step</td><td>Temp.(°C)</td><td>Time(min.)</td></tr><tr><td>1</td><td>Min. operating temp.+0/-3</td><td>30</td></tr><tr><td>2</td><td>25</td><td>2~3</td></tr><tr><td>3</td><td>Max. operating temp.+3/-0</td><td>30</td></tr><tr><td>4</td><td>25</td><td>2~3</td></tr></table><br>Leave the capacitor in ambient condition for specified time* before measurement<br>* 24 ± 2 hours (Class I)<br>24 ± 2 hours (Class II) | Step                                                                                                                                                | Temp.(°C) | Time(min.) | 1 | Min. operating temp.+0/-3 | 30 | 2 | 25 | 2~3 | 3 | Max. operating temp.+3/-0 | 30 | 4 | 25 | 2~3 |
|                       |                                           | Step             | Temp.(°C)                                                                                                                                                     | Time(min.)     |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |                                                                                                                                                     |           |            |   |                           |    |   |    |     |   |                           |    |   |    |     |
|                       |                                           | 1                | Min. operating temp.+0/-3                                                                                                                                     | 30             |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |                                                                                                                                                     |           |            |   |                           |    |   |    |     |   |                           |    |   |    |     |
|                       |                                           | 2                | 25                                                                                                                                                            | 2~3            |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |                                                                                                                                                     |           |            |   |                           |    |   |    |     |   |                           |    |   |    |     |
|                       |                                           | 3                | Max. operating temp.+3/-0                                                                                                                                     | 30             |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |                                                                                                                                                     |           |            |   |                           |    |   |    |     |   |                           |    |   |    |     |
|                       |                                           | 4                | 25                                                                                                                                                            | 2~3            |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |                                                                                                                                                     |           |            |   |                           |    |   |    |     |   |                           |    |   |    |     |
|                       |                                           | Capacitance      | Characteristics                                                                                                                                               |                |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               | Capacitance Change                                                                                                                                  |           |            |   |                           |    |   |    |     |   |                           |    |   |    |     |
|                       |                                           |                  | Class I                                                                                                                                                       |                |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               | Within ±2.5% or ±0.25pF Whichever is larger                                                                                                         |           |            |   |                           |    |   |    |     |   |                           |    |   |    |     |
|                       |                                           |                  | Class II                                                                                                                                                      | A(X5R)/B(X7R)/ |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               | Within ±7.5%                                                                                                                                        |           |            |   |                           |    |   |    |     |   |                           |    |   |    |     |
|                       |                                           |                  |                                                                                                                                                               | X(X6S)         |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               | Within ±15%                                                                                                                                         |           |            |   |                           |    |   |    |     |   |                           |    |   |    |     |
| F(Y5V)                | Within ±20%                               |                  |                                                                                                                                                               |                |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |                                                                                                                                                     |           |            |   |                           |    |   |    |     |   |                           |    |   |    |     |
|                       |                                           |                  |                                                                                                                                                               |                |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |                                                                                                                                                     |           |            |   |                           |    |   |    |     |   |                           |    |   |    |     |
| Q (Class I)           | Within the specified initial value        |                  |                                                                                                                                                               |                |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |                                                                                                                                                     |           |            |   |                           |    |   |    |     |   |                           |    |   |    |     |
| Tan δ (Class II)      | Within the specified initial value        |                  |                                                                                                                                                               |                |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |                                                                                                                                                     |           |            |   |                           |    |   |    |     |   |                           |    |   |    |     |
| Insulation Resistance | Within the specified initial value        |                  |                                                                                                                                                               |                |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |                                                                                                                                                     |           |            |   |                           |    |   |    |     |   |                           |    |   |    |     |

## RELIABILITY TEST CONDITION

| 18          | Recommended Soldering Method                             |                   |                               |             |           |        |
|-------------|----------------------------------------------------------|-------------------|-------------------------------|-------------|-----------|--------|
|             | Recommended<br>Soldering Method<br>By Size & Capacitance | Size<br>inch (mm) | Temperature<br>Characteristic | Capacitance | Condition |        |
|             |                                                          |                   |                               |             | Flow      | Reflow |
|             |                                                          | 0201 (0603)       | -                             | -           | -         | ○      |
|             |                                                          | 0402 (1005)       |                               |             |           |        |
|             |                                                          | 0603 (1608)       | Class I                       | -           | ○         | ○      |
|             |                                                          |                   | Class II                      | C < 1μF     | ○         | ○      |
|             |                                                          |                   |                               | C ≥ 1μF     | -         | ○      |
|             |                                                          | 0805 (2012)       | Class I                       | -           | ○         | ○      |
|             |                                                          |                   | Class II                      | C < 4.7μF   | ○         | ○      |
| C ≥ 4.7μF   |                                                          |                   |                               | -           | ○         |        |
| Array       | -                                                        |                   | -                             | ○           |           |        |
| 1206 (3216) | Class I                                                  | -                 | ○                             | ○           |           |        |
|             | Class II                                                 | C < 10μF          | ○                             | ○           |           |        |
|             |                                                          | C ≥ 10μF          | -                             | ○           |           |        |
|             | Array                                                    | -                 | -                             | ○           |           |        |
| 1210 (3225) | -                                                        | -                 | -                             | ○           |           |        |
| 1808 (4520) |                                                          |                   |                               | ○           |           |        |
| 1812 (4532) |                                                          |                   |                               | ○           |           |        |
| 2220 (5750) |                                                          |                   |                               | ○           |           |        |

### Note1. Initial Measurement For Class II

Perform the heat treatment at  $150^{\circ}\text{C} \pm 0/-10^{\circ}\text{C}$  for 1 hour. Then Leave the capacitor in ambient condition for  $48 \pm 4$  hours before measurement. Then perform the measurement.

### Note2. Latter Measurement

#### 1. CLASS I

Leave the capacitor in ambient condition for  $24 \pm 2$  hours before measurement

Then perform the measurement.

#### 2. Class II

Perform the heat treatment at  $150^{\circ}\text{C} \pm 0/-10^{\circ}\text{C}$  for 1 hour. Then Leave the capacitor in ambient condition for  $48 \pm 4$  hours before measurement.

Then perform the measurement.

\*Table1.

| Tan $\delta$                  | 0.125max*                          |
|-------------------------------|------------------------------------|
| Class II<br>A(X5R),<br>B(X7R) | 0201 $C \geq 0.022\mu F$           |
|                               | 0402 $C \geq 0.22\mu F$            |
|                               | 0603 $C \geq 2.2\mu F$             |
|                               | 0805 $C \geq 4.7\mu F$             |
|                               | 1206 $C \geq 10.0\mu F$            |
|                               | 1210 $C \geq 22.0\mu F$            |
|                               | 1812 $C \geq 47.0\mu F$            |
|                               | 2220 $C \geq 100.0\mu F$           |
|                               | All Low Profile Capacitors (P.16). |

\*Table2.

| High Temperature Resistance test |                          |
|----------------------------------|--------------------------|
| $\Delta C$ (Y5V)                 | $\pm 30\%$               |
| Class II<br>F(Y5V)               | 0402 $C \geq 0.47\mu F$  |
|                                  | 0603 $C \geq 2.2\mu F$   |
|                                  | 0805 $C \geq 4.7\mu F$   |
|                                  | 1206 $C \geq 10.0\mu F$  |
|                                  | 1210 $C \geq 22.0\mu F$  |
|                                  | 1812 $C \geq 47.0\mu F$  |
|                                  | 2220 $C \geq 100.0\mu F$ |


\*Table3.

| High Temperature Resistance test                    |                                    |                           |
|-----------------------------------------------------|------------------------------------|---------------------------|
| Applied Voltage                                     | 100% of the rated voltage          | 150% of the rated voltage |
| Class II<br>A(X5R),<br>B(X7R),<br>X(X6S),<br>F(Y5V) | 0201 $C \geq 0.1\mu F$             | 0201 $C \geq 0.022\mu F$  |
|                                                     | 0402 $C \geq 1.0\mu F$             | 0402 $C \geq 0.47\mu F$   |
|                                                     | 0603 $C \geq 4.7\mu F$             | 0603 $C \geq 2.2\mu F$    |
|                                                     | 0805 $C \geq 22.0\mu F$            | 0805 $C \geq 4.7\mu F$    |
|                                                     | 1206 $C \geq 47.0\mu F$            | 1206 $C \geq 10.0\mu F$   |
|                                                     | 1210 $C \geq 100.0\mu F$           | 1210 $C \geq 22.0\mu F$   |
|                                                     | All Low Profile Capacitors (P.16). | 1812 $C \geq 47.0\mu F$   |
|                                                     |                                    | 2220 $C \geq 100.0\mu F$  |
|                                                     |                                    |                           |

Note3. All Size In Reliability Test Condition Section is "inch"

## PACKAGING


### ● CARDBOARD PAPER TAPE (4mm)

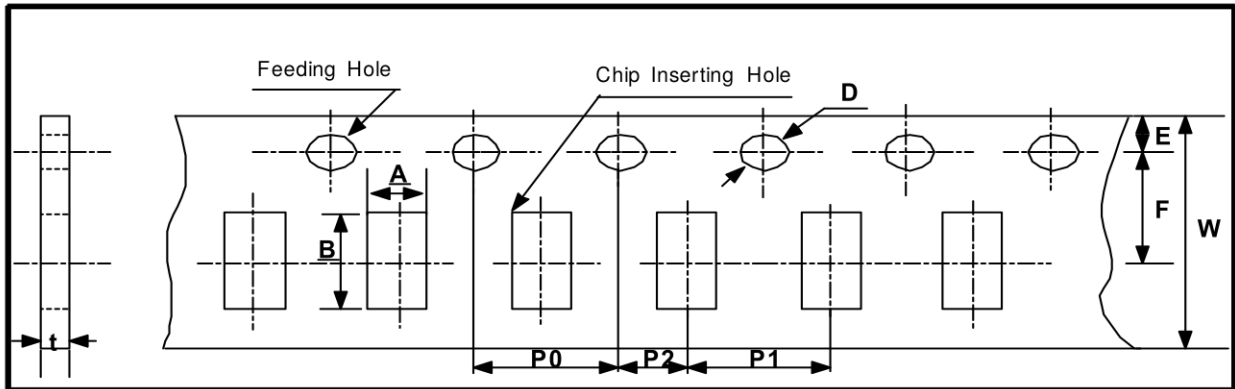

unit : mm

| Symbol Type |             | A           | B           | W           | F            | E            | P1          | P2           | P0          | D               | t            |
|-------------|-------------|-------------|-------------|-------------|--------------|--------------|-------------|--------------|-------------|-----------------|--------------|
| Dimension   | 0603 (1608) | 1.1<br>±0.2 | 1.9<br>±0.2 | 8.0<br>±0.3 | 3.5<br>±0.05 | 1.75<br>±0.1 | 4.0<br>±0.1 | 2.0<br>±0.05 | 4.0<br>±0.1 | Φ1.5<br>+0.1/-0 | 1.1<br>Below |
|             | 0805 (2012) | 1.6<br>±0.2 | 2.4<br>±0.2 |             |              |              |             |              |             |                 |              |
|             | 1206 (3216) | 2.0<br>±0.2 | 3.6<br>±0.2 |             |              |              |             |              |             |                 |              |

### ● CARDBOARD PAPER TAPE (2mm)

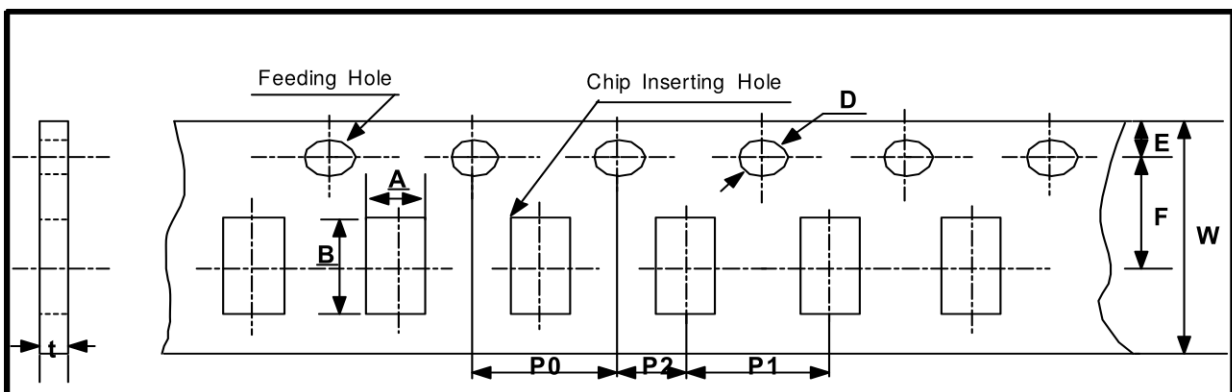


unit : mm

| Symbol Type |             | A             | B             | W           | F            | E            | P1           | P2           | P0          | D                  | t             |
|-------------|-------------|---------------|---------------|-------------|--------------|--------------|--------------|--------------|-------------|--------------------|---------------|
| Dimension   | 0201 (0603) | 0.38<br>±0.03 | 0.68<br>±0.03 | 8.0<br>±0.3 | 3.5<br>±0.05 | 1.75<br>±0.1 | 2.0<br>±0.05 | 2.0<br>±0.05 | 4.0<br>±0.1 | Φ1.5<br>+0.1/-0.03 | 0.37<br>±0.03 |
|             | 0402 (1005) | 0.62<br>±0.04 | 1.12<br>±0.04 |             |              |              |              |              |             |                    | 0.6<br>±0.05  |

## PACKAGING

### ● EMBOSSED PLASTIC TAPE

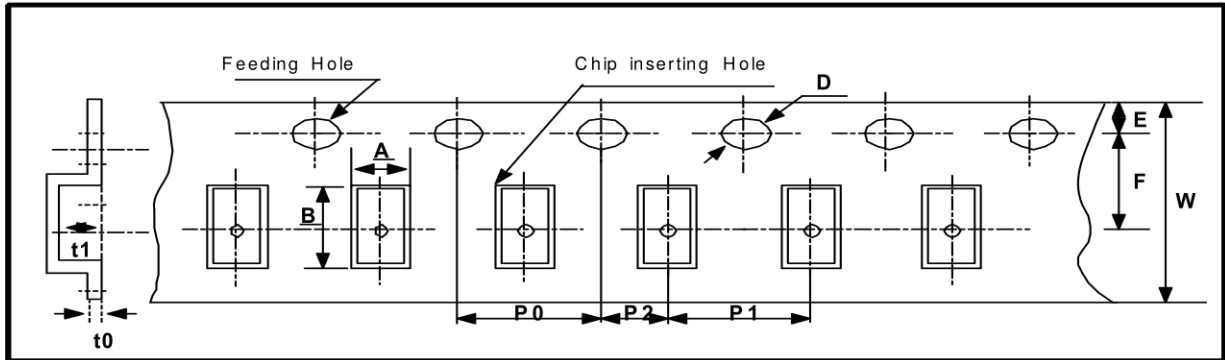


unit : mm

| Symbol    |                | A            | B           | W            | F             | E            | P1          | P2           | P0          | D               | t1         | t0           |
|-----------|----------------|--------------|-------------|--------------|---------------|--------------|-------------|--------------|-------------|-----------------|------------|--------------|
| Type      |                |              |             |              |               |              |             |              |             |                 |            |              |
| Dimension | 0805<br>(2012) | 1.45<br>±0.2 | 2.3<br>±0.2 | 8.0<br>±0.3  | 3.5<br>±0.05  | 1.75<br>±0.1 | 4.0<br>±0.1 | 2.0<br>±0.05 | 4.0<br>±0.1 | Φ1.5<br>+0.1/-0 | 2.5<br>max | 0.6<br>Below |
|           | 1206<br>(3216) | 1.9<br>±0.2  | 3.5<br>±0.2 |              |               |              |             |              |             |                 |            |              |
|           | 1210<br>(3225) | 2.9<br>±0.2  | 3.7<br>±0.2 |              |               |              |             |              |             |                 |            |              |
|           | 1808<br>(4520) | 2.3<br>±0.2  | 4.9<br>±0.2 | 12.0<br>±0.3 | 5.60<br>±0.05 | 8.0<br>±0.1  |             |              |             |                 |            |              |
|           | 1812<br>(4532) | 3.6<br>±0.2  | 4.9<br>±0.2 |              |               |              |             |              |             |                 |            |              |
|           | 2220<br>(5750) | 5.5<br>±0.2  | 6.2<br>±0.2 |              |               |              |             |              |             |                 |            |              |

General Capacitors


### ● TAPING SIZE

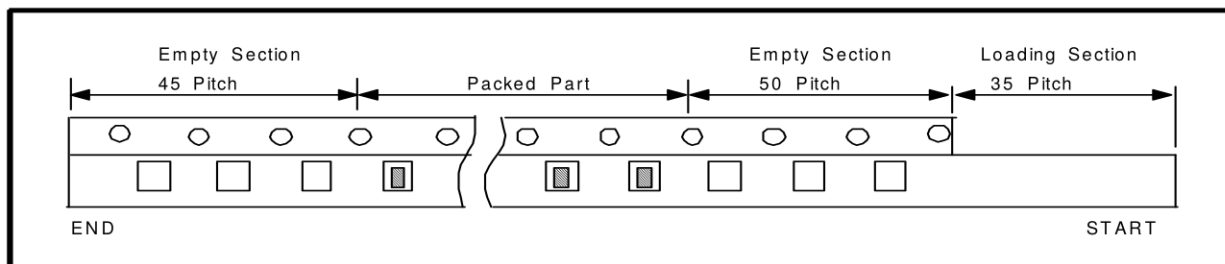

| Type     | Symbol | Size                     | Cardboard Paper Tape        | Symbol | Size                                                 | Embossed Plastic Tape |
|----------|--------|--------------------------|-----------------------------|--------|------------------------------------------------------|-----------------------|
| 7" Reel  | C      | 0201(0603)               | 10,000                      | E      | All Size ≤3216<br>1210(3225),1808(4520)<br>(t≤1.6mm) | 2,000                 |
|          |        | 0402(1005)               | 10,000                      |        | 1210(3225)(t≥2.0mm)                                  | 1,000                 |
|          |        | OTHERS                   | 4,000                       |        | 1808(4520)(t≥2.0mm)                                  | 1,000                 |
| 10" Reel | O      | -                        | 10,000                      | -      | -                                                    | -                     |
| 13" Reel | D      | 0402(1005)               | 50,000                      | F      | All Size ≤3216<br>1210(3225),1808(4520)<br>(t≤1.6mm) | 10,000                |
|          |        | OTHERS                   | 10,000                      |        | 1210(3225)(1.6≤t<2.0mm)<br>1206(3216)(1.6≤t)         | 8,000                 |
|          | L      | 0603(1608)               | 10,000 or 15,000            |        | 1210(3225),1808(4520)<br>(t≥2.0mm)                   | 4,000                 |
|          |        | 0805(2012)<br>(t≤0.85mm) | 15,000 or<br>10,000(Option) |        | 1812(4532)(t≤2.0mm)                                  | 4,000                 |
|          |        | 1206(3216)<br>(t≤0.85mm) | 10,000                      |        | 1812(4532)(t>2.0mm)<br>5750(2220)                    | 2,000                 |

## PACKAGING

### ● REEL DIMENSION

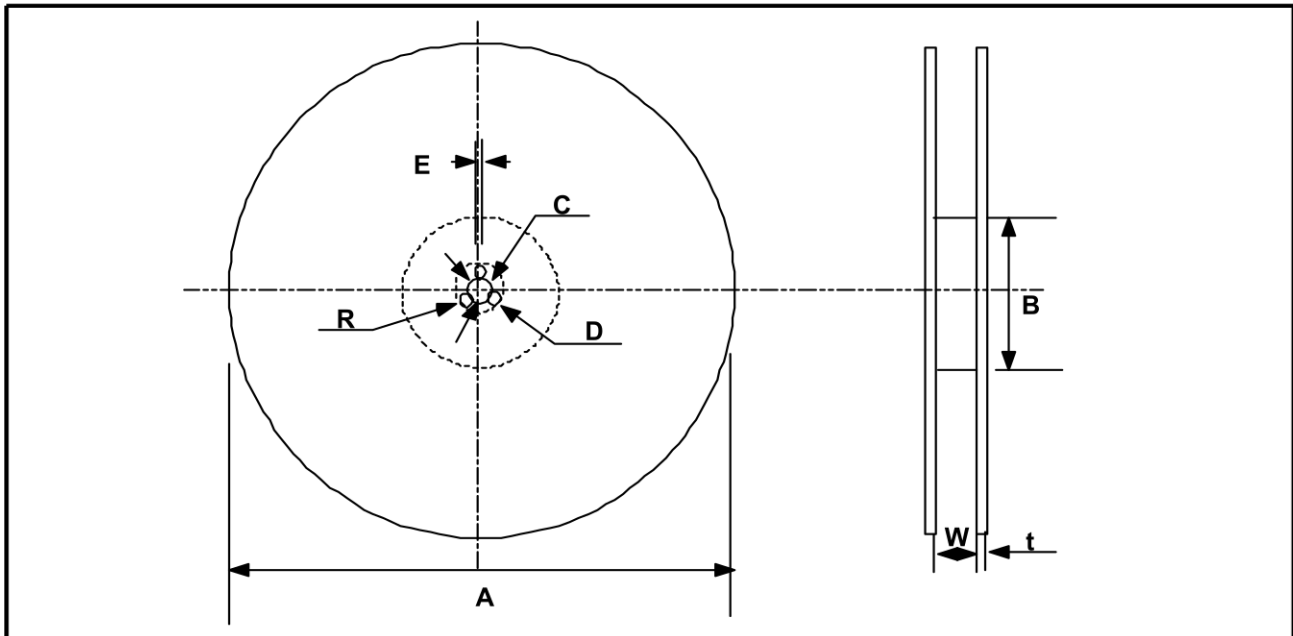


unit : mm

| Symbol   | A                 | B              | C                | D           | E            | W          | t            | R   |
|----------|-------------------|----------------|------------------|-------------|--------------|------------|--------------|-----|
| 7" Reel  | $\phi 180+0/-3$   | $\phi 60+1/-3$ | $\phi 13\pm 0.3$ | $25\pm 0.5$ | $2.0\pm 0.5$ | $9\pm 1.5$ | $1.2\pm 0.2$ | 1.0 |
| 13" Reel | $\phi 330\pm 2.0$ | $\phi 80+1/-3$ |                  |             |              |            | $2.2\pm 0.2$ |     |

## ● BULK CASE PACKAGING

- Bulk case packaging can reduce the stock space and transportation costs.
- The bulk feeding system can increase the productivity.
- It can eliminate the components loss.

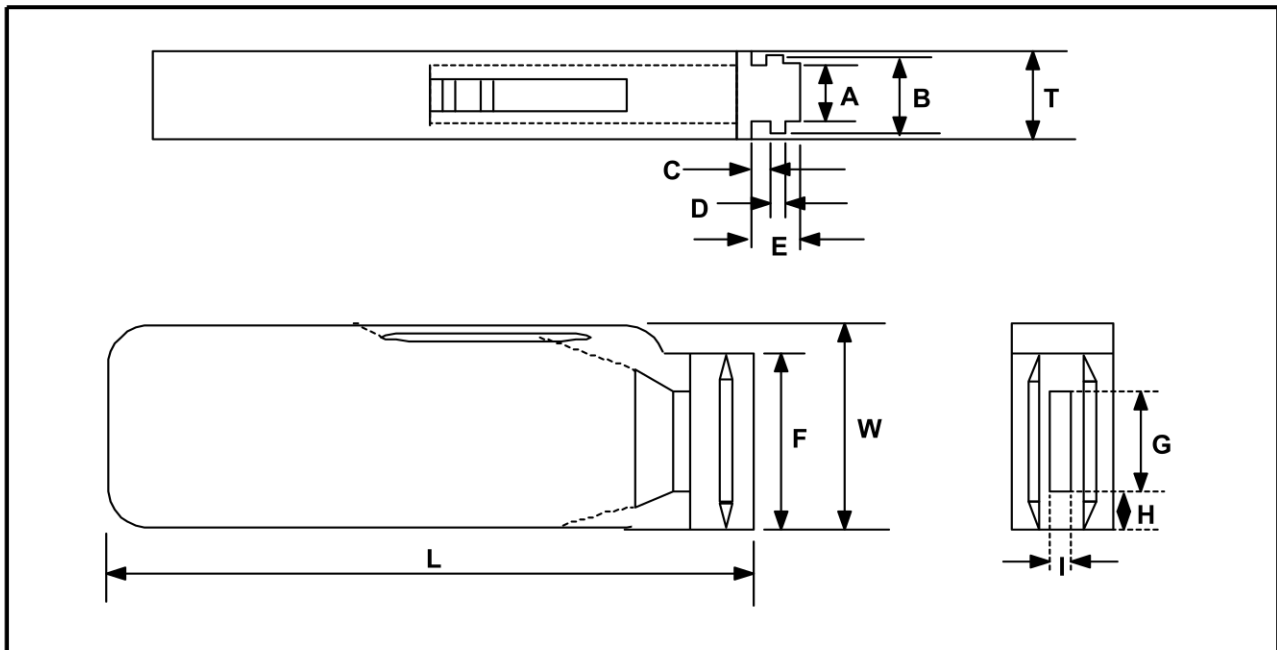

unit : mm

| Symbol    | A             | B             | T            | C              | D            | E              |
|-----------|---------------|---------------|--------------|----------------|--------------|----------------|
| Dimension | $6.8 \pm 0.1$ | $8.8 \pm 0.1$ | $12 \pm 0.1$ | $1.5 + 0.1/-0$ | $2 + 0/-0.1$ | $3.0 + 0.2/-0$ |

| Symbol    | F               | W             | G             | H            | L             | I            |
|-----------|-----------------|---------------|---------------|--------------|---------------|--------------|
| Dimension | $31.5 + 0.2/-0$ | $36 + 0/-0.2$ | $19 \pm 0.35$ | $7 \pm 0.35$ | $110 \pm 0.7$ | $5 \pm 0.35$ |

## ● QUANTITY OF BULK CASE PACKAGING



unit : pcs

| Size     | 0402(1005) | 0603(1608)       | 0805(2012) |                 |
|----------|------------|------------------|------------|-----------------|
|          |            |                  | T=0.65mm   | T=0.85mm        |
| Quantity | 50,000     | 10,000 or 15,000 | 10,000     | 5,000 or 10,000 |


## APPLICATION MANUAL

### ● ELECTRICAL CHARACTERISTICS


#### ► CAPACITANCE - TEMPERATURE CHARACTERISTICS

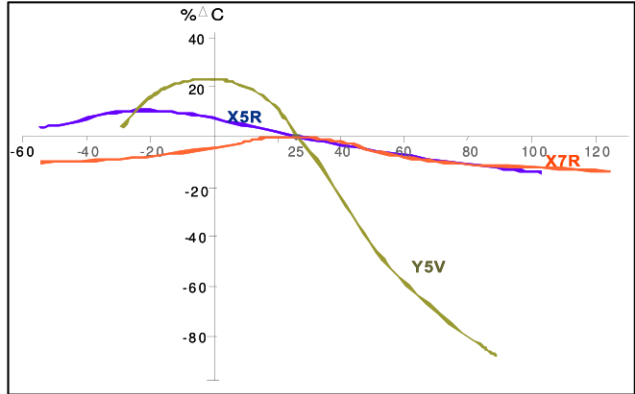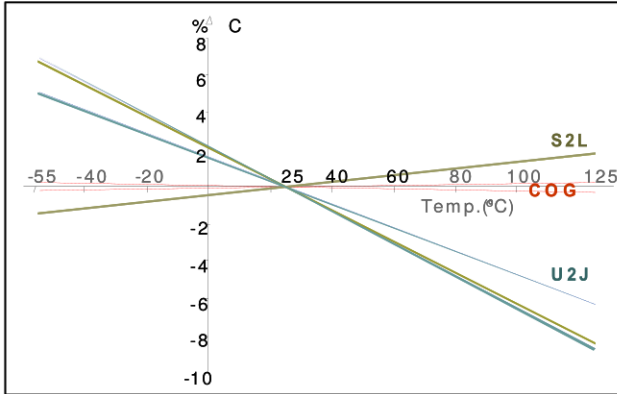



#### ► CAPACITANCE - DC VOLTAGE CHARACTERISTICS

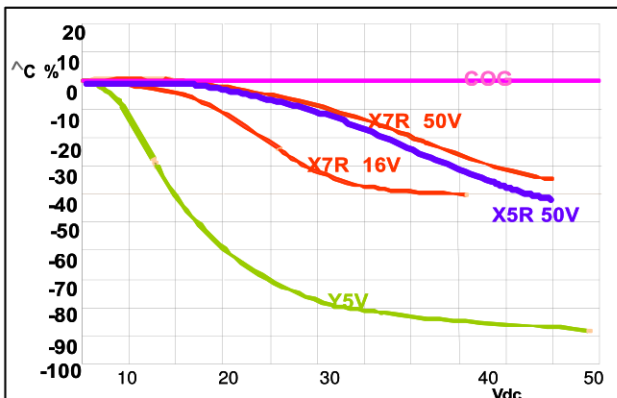

#### ► CAPACITANCE CHANGE - AGING

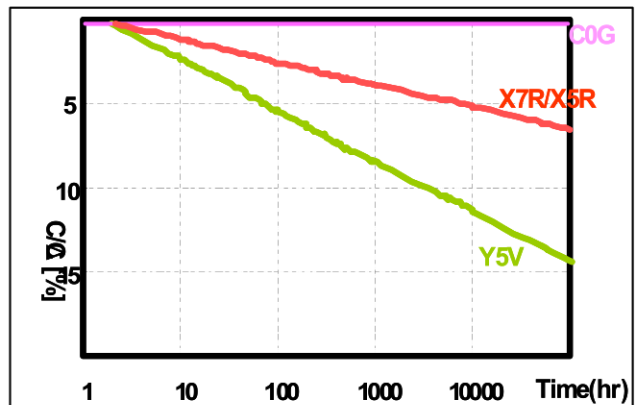

#### ► IMPEDANCE - FREQUENCY CHARACTERISTICS

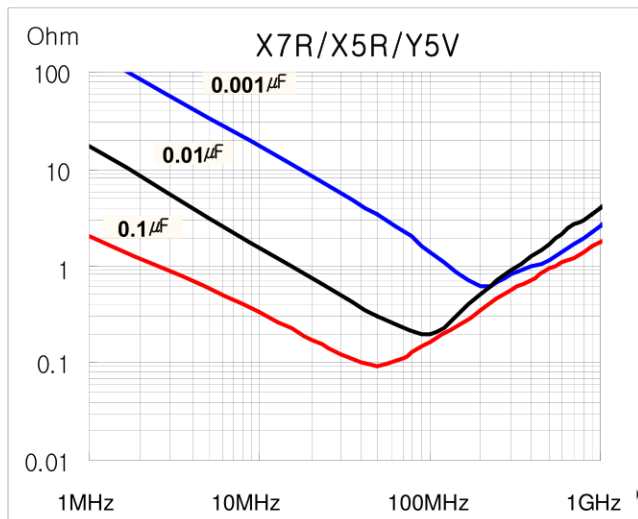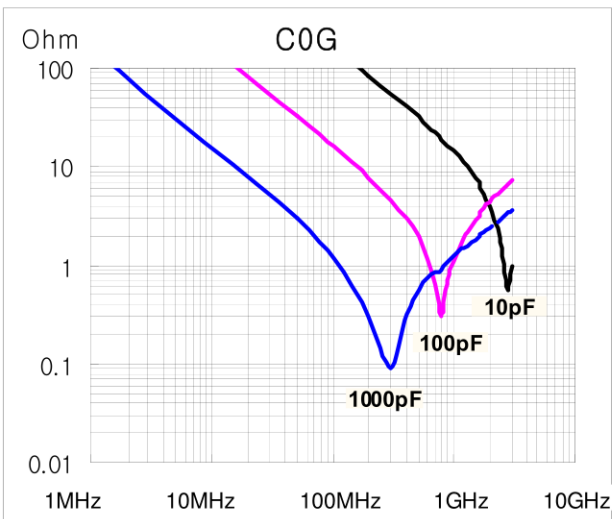

## ● STORAGE CONDITION

### ► Storage Environment

The electrical characteristics of MLCCs were degraded by the environment of high temperature or humidity. Therefore, the MLCCs shall be stored in the ambient temperature and the relative humidity of less than 40 °C and 70%, respectively.

Guaranteed storage period is within 6 months from the outgoing date of delivery.

### ► Corrosive Gases

Since the solderability of the end termination in MLCC was degraded by a chemical atmosphere such as chlorine, acid or sulfide gases, MLCCs must be avoid from these gases.

### ► Temperature Fluctuations

Since dew condensation may occur by the differences in temperature when the MLCCs are taken out of storage, it is important to maintain the temperature-controlled environment.

## ● DESIGN OF LAND PATTERN



When designing printed circuit boards, the shape and size of the lands must allow for the proper amount of solder on the capacitor.

The amount of solder at the end terminations has a direct effect on the crack.

The crack in MLCC will be easily occurred by the tensile stress which was due to too much amount of solder. In contrast, if too little solder is applied, the termination strength will be insufficiently.

Use the following illustrations as guidelines for proper land design.

Recommendation of Land Shape and Size.

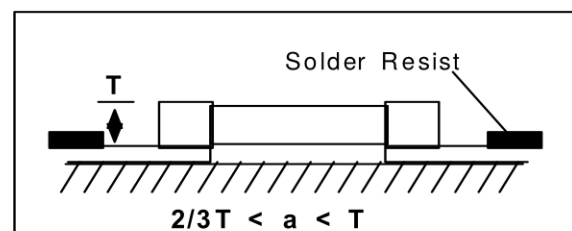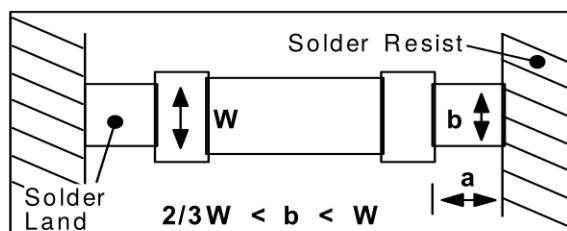

## ● ADHESIVES

When flow soldering the MLCCs, apply the adhesive in accordance with the following conditions.

### ► Requirements for Adhesives

They must have enough adhesion, so that, the chips will not fall off or move during the handling of the circuit board.

They must maintain their adhesive strength when exposed to soldering temperature.


They should not spread or run when applied to the circuit board.

They should harden quickly. They should not corrode the circuit board or chip material.

They should be a good insulator. They should be non-toxic, and not produce harmful gases, nor be harmful when touched.

### ► Application Method

It is important to use the proper amount of adhesive. Too little and much adhesive will cause poor adhesion and overflow into the land, respectively.

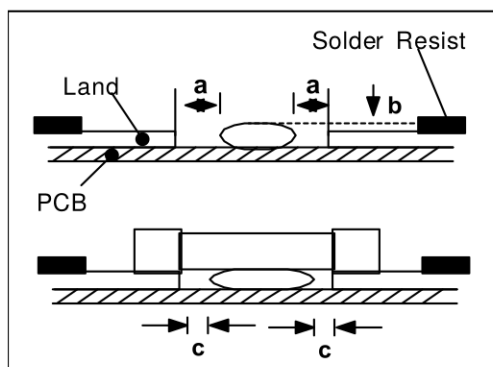

unit : mm

| Type | 21                   | 31                   |
|------|----------------------|----------------------|
| a    | 0.2 min              | 0.2 min              |
| b    | 70~100 $\mu\text{m}$ | 70~100 $\mu\text{m}$ |
| c    | > 0                  | > 0                  |

### ► Adhesive hardening Characteristics

To prevent oxidation of the terminations, the adhesive must harden at 160°C or less, within 2 minutes or less.


## ● MOUNTING

### ► Mounting Head Pressure

Excessive pressure will cause crack to MLCCs. The pressure of nozzle will be 300g maximum during mounting.

## ► Bending Stress

When double-sided circuit boards are used, MLCCs first are mounted and soldered onto one side of the board. When the MLCCs are mounted onto the other side, it is important to support the board as shown in the illustration. If the circuit board is not supported, the crack occur to the ready-installed MLCCs by the bending stress.

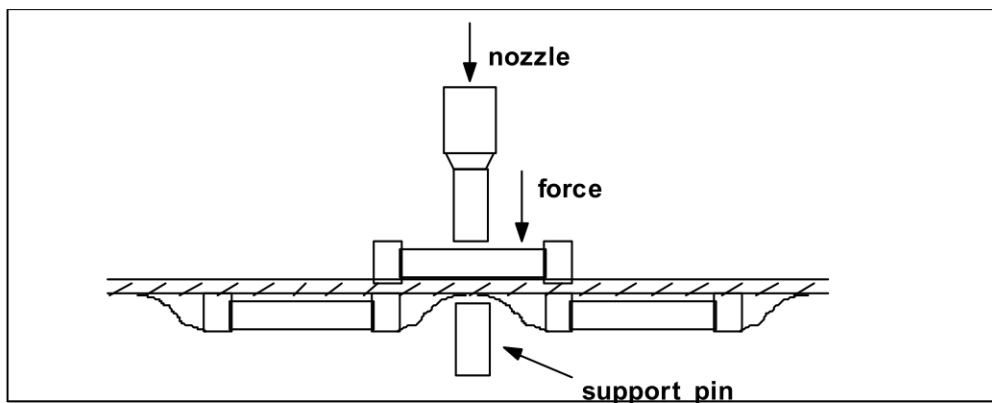




## ► Manual Soldering

Manual soldering can pose a great risk of creating thermal cracks in chip capacitors.

The hot soldering iron tip comes into direct contact with the end terminations, and operator's carelessness may cause the tip of the soldering iron to come into direct contact with the ceramic body of the capacitor.

Therefore the soldering iron must be handled carefully, and close attention must be paid to the selection of the soldering iron tip and to temperature control of the tip.

## ► Amount of Solder

|                   |                                                                                     |                                                                            |
|-------------------|-------------------------------------------------------------------------------------|----------------------------------------------------------------------------|
| Too much Solder   |  | Cracks tend to occur due to large stress                                   |
| Not enough Solder |  | Weak holding force may cause bad connections or detaching of the capacitor |
| Good              |  |                                                                            |

## ► Cooling

Natural cooling using air is recommended. If the chips are dipped into solvent for cleaning, the temperature difference( $\Delta T$ ) must be less than 100 °C


## ► Cleaning

If rosin flux is used, cleaning usually is unnecessary. When strongly activated flux is used, chlorine in the flux may dissolve into some types of cleaning fluids, thereby affecting the chip capacitors. This means that the cleaning fluid must be carefully selected, and should always be new.


## ► Notes for Separating Multiple, Shared PC Boards.

A multi-PC board is separated into many individual circuit boards after soldering has been completed. If the board is bent or distorted at the time of separation, cracks may occur in the chip capacitors. Carefully choose a separation method that minimizes the bending of circuit board.

## ► Recommended Soldering Profile

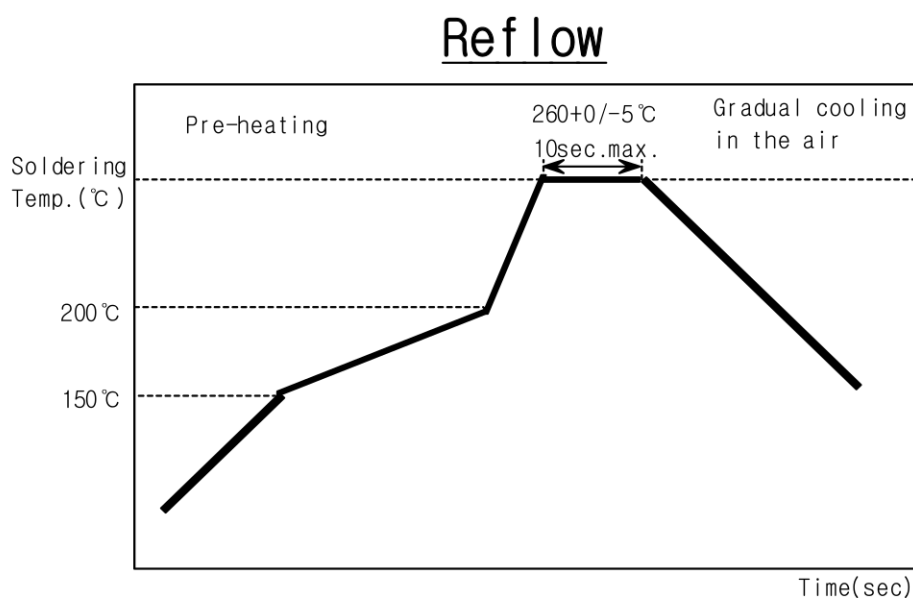

## Flow

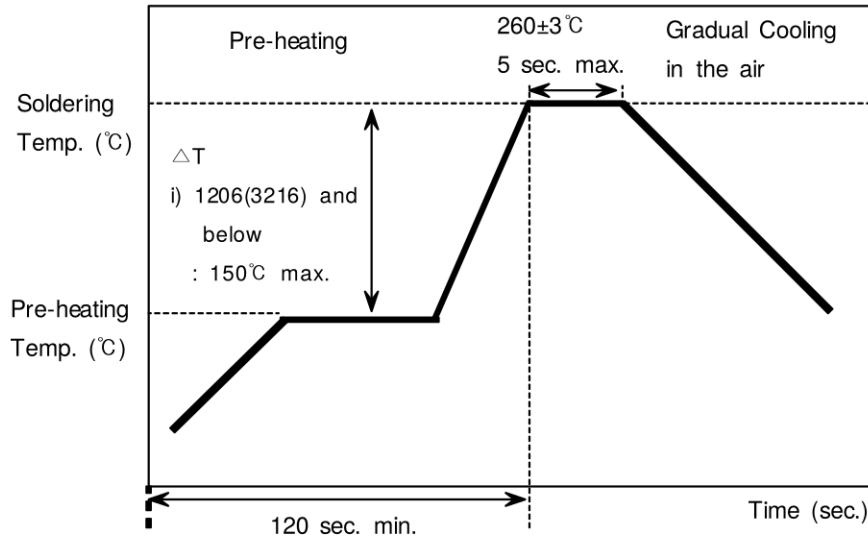

## Soldering Iron

| Variation of Temp.  | Soldering Temp (°C)             | Pre-heating Time (Sec) | Soldering Time(Sec) | Cooling Time(Sec) |
|---------------------|---------------------------------|------------------------|---------------------|-------------------|
| $\Delta T \leq 130$ | $300 \pm 10^\circ \text{C max}$ | $\geq 60$              | $\leq 4$            | -                 |

| Condition of Iron facilities |              |                |
|------------------------------|--------------|----------------|
| Wattage                      | Tip Diameter | Soldering Time |
| 20W Max                      | 3mm Max      | 4 Sec Max      |

**\* Caution - Iron Tip Should Not Contact With Ceramic Body Directly.**