


# 3-Leiter-Durchführungsfilter

## YFF15PC0G435MT000N

<b>Produktstatus</b>	<a href="#">Production</a>
<b>Anwendungen</b>	Commercial Grade
<b>Merkmale</b>	PowerFor Power Line
<b>Serie</b>	YFF
<b>Produktmarke</b>	TDK
<b>Umweltverträglichkeit</b>	



### Grösse

Länge (L)	1.05mm ±0.05mm
Breite (W)	0.65mm ±0.05mm
Dicke (T)	0.45mm ±0.05mm

### Elektrische Kennwerte

Einfügungsdämpfung [Typ.]	40dB (0.2MHz to 1GHz)
Grenzfrequenz [Typ.]	
Nennspannung [Max.]	4V
Nennstrom [Max.]	2A
Nennstrom Derating	
Gleichstromwiderstand (Max.)	12mΩ
Nennkapazität [Typ.]	4.3μF

### Weiteres







Schaltungstyp	Feed Through Type
Übertragungsleitung	Single-ended
Betriebstemperaturbereich	-55 to 85°C
Lötverfahren	Reflow
AEC-Q200	NO
Verpackung	Punched (Paper)Taping [180mm Reel]
Stückzahl	10000pcs
Gewicht	
FIT (Failure In Time)	This will be displayed when you <a href="#">login</a> to myTDK

! Images are for reference only and show exemplary products.

! This PDF document was created based on the data listed on the TDK Corporation website.

! All specifications are subject to change without notice.

Darstellung der Eigenschaften (Dies sind Referenzwerte. Sie stellen nicht die tatsächlichen Produkteigenschaften dar.)

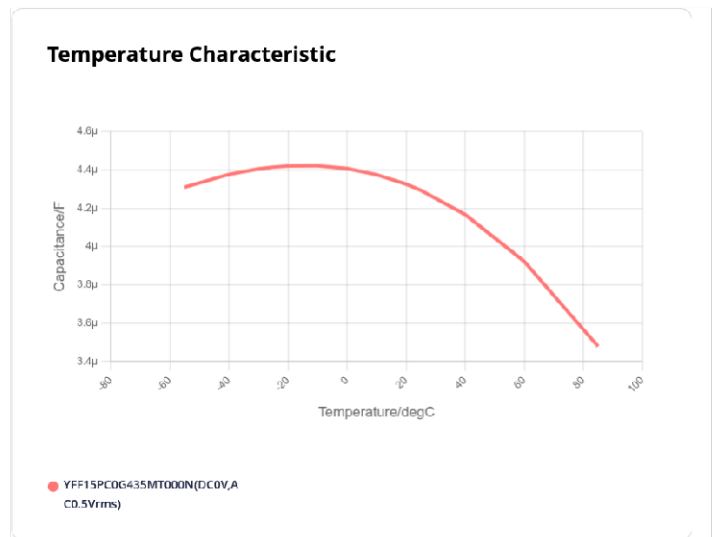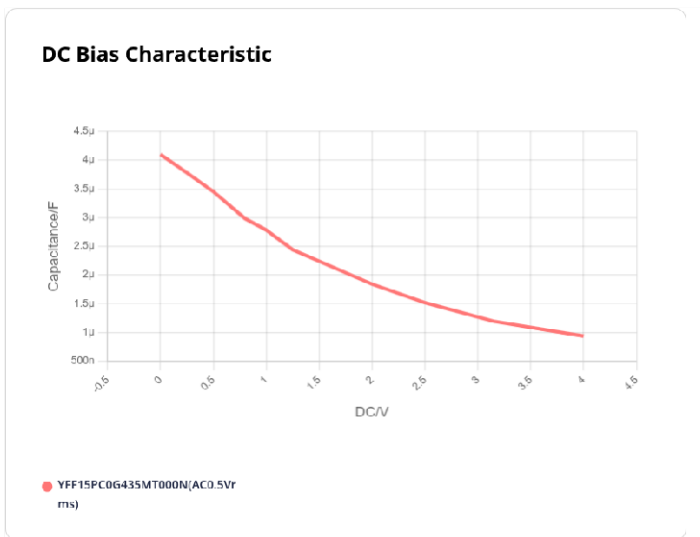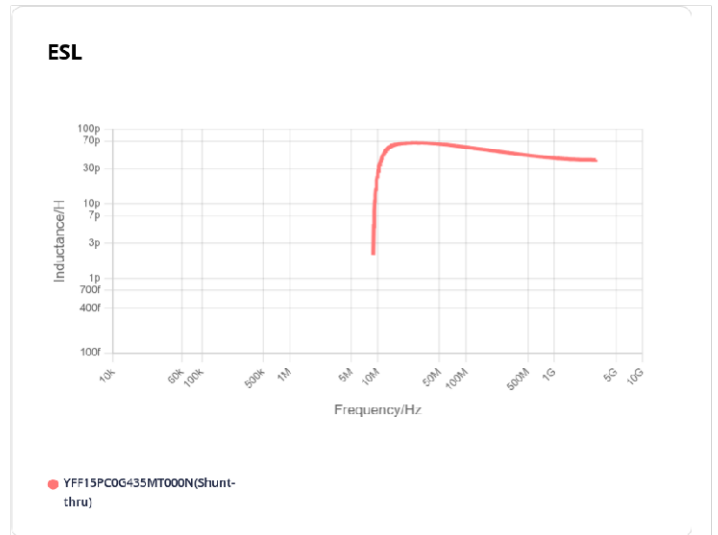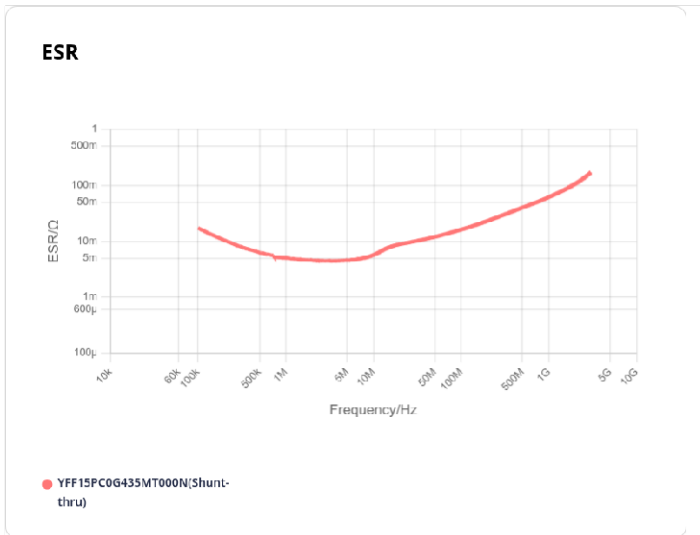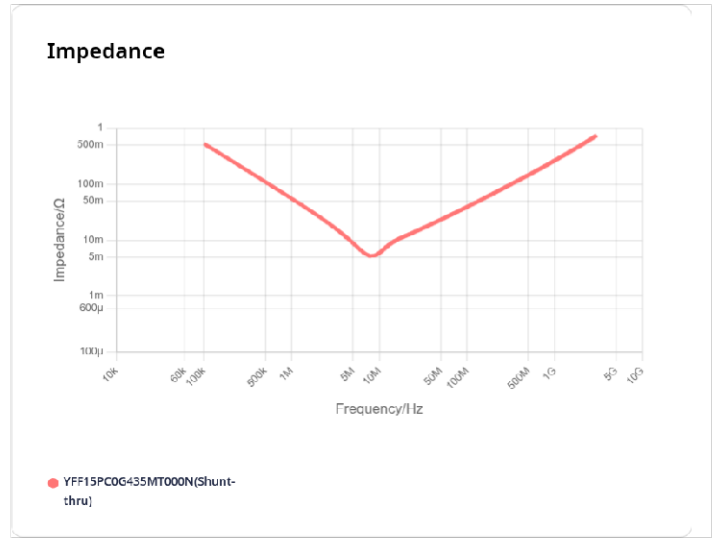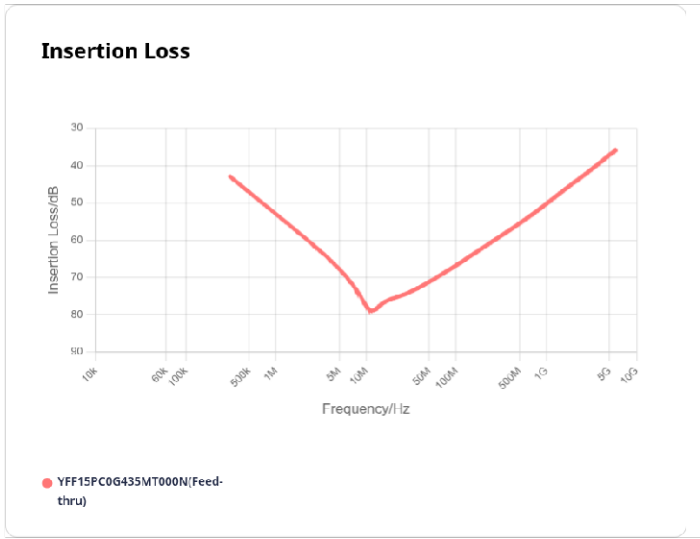

! Images are for reference only and show exemplary products.  
! This PDF document was created based on the data listed on the TDK Corporation website.  
! All specifications are subject to change without notice.

Dazugehörige Bilder

