


## 46.02 mm Diameter 15 Turn Dial



## FEATURES


- Round Vernier Scale
- 1 - 13/16" Dia.
- 1/4" or 1/8" or 6 mm metric bore Shaft Adapter
- Satin Chrome Finish with Black Markings
- Black Chrome Finish with White Markings
- Brushed Chrome Finish with Black Markings



| MECHANICAL SPECIFICATIONS                                            |                                                                                                 |
|----------------------------------------------------------------------|-------------------------------------------------------------------------------------------------|
| PARAMETER                                                            |                                                                                                 |
| Mounting                                                             | Direct to shaft with # 4 - 40 hex socket set screw located adjacent to No.75 on graduated dial. |
| Numeral Size:<br>Counter wheel:<br>Graduated dial:                   | 0.90 H x 0.013 Inches W (2.29 x 0.33 cm)<br>0.109 x 0.018 Inches (2.77 x 0.46 cm)               |
| Graduation Size:<br>Numeral and every Fifth<br>Intermediate<br>Width | 0.55 Inches L (1.40 cm)<br>0.035 Inches L (0.89 cm)<br>0.012 Inches (0.30 cm)                   |
| Weight                                                               | 3.0 maximum (85.05)                                                                             |

| OPERATIONAL SPECIFICATIONS |                                                                                                                                                                                                     |
|----------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Readout and Operation      | 1499 turns total<br>The number in window (0 thru 14) indicates completed number of turns of the drive sleeve. Graduated circular dial indicates the percent of the partial turn of the drive sleeve |
| Transfer Point             | The number in center of window shall change as graduated dial rotates between 94 and 0                                                                                                              |
| Rotation                   | Readout shall increase with clockwise and decrease with counterclockwise rotation                                                                                                                   |
| Accuracy                   | Zero backlash between graduated dial and the drive sleeve                                                                                                                                           |

## DIMENSIONS in inches (millimeters)

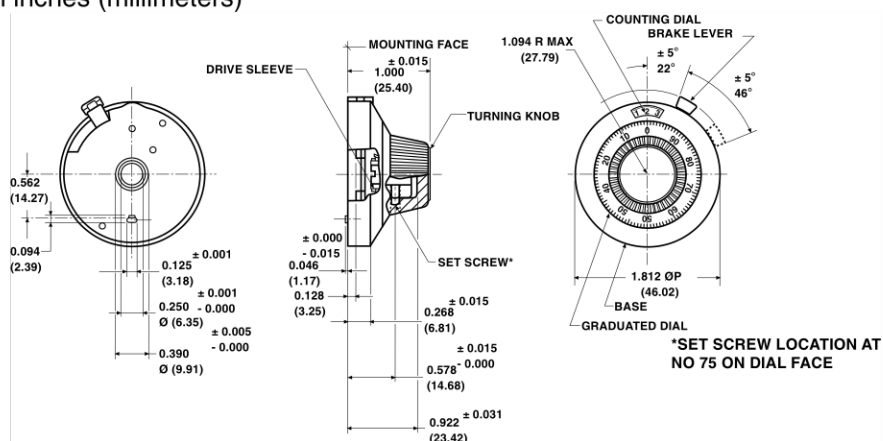

## ORDERING INFORMATION/DESCRIPTION

| 21    | A                                                                                   | 11                                                                                                         | B010      | e           |
|-------|-------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------|-----------|-------------|
| MODEL | SHAFT DIAMETER AND ACCOMODATION                                                     | FINISH AND OTHER FEATURES                                                                                  | PACKAGING | LEAD FINISH |
|       | A 1/4" Shaft (standard)<br>B 6 mm metric bore shaft adapter<br>C 1/8" Shaft adapter | 11. Satin chrome, black markings<br>21. Black chrome, white markings<br>31. Brushed chrome, black markings |           |             |

Example: 21 - A - 11

## SAP PART NUMBERING GUIDELINES

|       |   |                |        |   |           |   |   |
|-------|---|----------------|--------|---|-----------|---|---|
| 2     | 1 | A              | 1      | 1 | B         | 1 | 0 |
| MODEL |   | SHAFT DIAMETER | FINISH |   | PACKAGING |   |   |



### Notice

Specifications of the products displayed herein are subject to change without notice. Vishay Intertechnology, Inc., or anyone on its behalf, assumes no responsibility or liability for any errors or inaccuracies.

Information contained herein is intended to provide a product description only. No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document. Except as provided in Vishay's terms and conditions of sale for such products, Vishay assumes no liability whatsoever, and disclaims any express or implied warranty, relating to sale and/or use of Vishay products including liability or warranties relating to fitness for a particular purpose, merchantability, or infringement of any patent, copyright, or other intellectual property right.

The products shown herein are not designed for use in medical, life-saving, or life-sustaining applications. Customers using or selling these products for use in such applications do so at their own risk and agree to fully indemnify Vishay for any damages resulting from such improper use or sale.